

# BLADE

## Recessed

The **BLADE** is an energy efficient edge-lit LED Panel for recessed, surface mount and suspended applications for offices, schools, shopping centres and reception areas



**LIGHT** **ALLIANCE**  
Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

# BLADE

## Recessed



### APPLICATIONS

- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

### SPECIFICATIONS

**Housing:** Aluminium extruded frame

**Heat Sink:** Aluminium

**Light Source:** LED

**Diffuser:** PMMA for better light transmission

**Finish:** Powder Coated

**Colours:** White

**Beam Angle:** 110°


**Mounting:** Recessed, Surface & Suspended

**Lumen Maintenance:** L<sub>80</sub> B<sub>10</sub> 50,000 Hours

**CCT:** 4000K, 5000K

**CRI:** >80

**Available on Request:** Triac Dimmable, DALI Dimmable, Emergency Battery Back

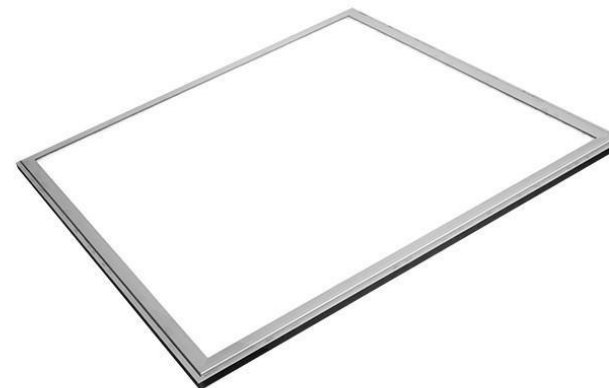

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Beam	Dimensions	Reference Code
30	3 300	4000K	110	>80	110°	595mm X 595mm X 10mm	LARB-30W-6060-4K
30	3 300	5000K	110	>80	110°	595mm X 595mm X 10mm	LARB-30W-6060-5K
50	5 500	4000K	110	>80	110°	1195mm X 595mm X 10mm	LARB-50W-1260-4K
50	5 500	5000K	110	>80	110°	1195mm X 595mm X 10mm	LARB-50W-1260-5K
30	3 300	4000K	110	>80	110°	1195mm X 295mm X 10mm	LARB-30W-1230-4K
30	3 300	5000K	110	>80	110°	1195mm X 295mm X 10mm	LARB-30W-1230-5K