

RECESSED



BLADE B

LED

Introducing the **BLADE B** backlit LED Panel. Optimized low glare lighting for office applications. Available in 600 x 600 and 1200 x 600 format for suspended ceiling systems.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

RECESSED

BLADE B




APPLICATIONS

- Public Buildings
- Retail Lighting
- Office Lighting
- Educational Buildings

PRODUCT SPECIFICATIONS

LED Driver	External (Supplied)
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	4000K, 5000K
CRI	> 80
Lifetime	Up to 50 000 hours - L80 B10
Application Temperature	-10°C to 45°C
Available Emergency	1Hr - 3Hr (remote)
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Aluminum & Steel
Finish	White
Diffuser	PMMA Opal Diffuser - UV Stable
Mounting	Recessed
Surge Protection	4kv Surge protection

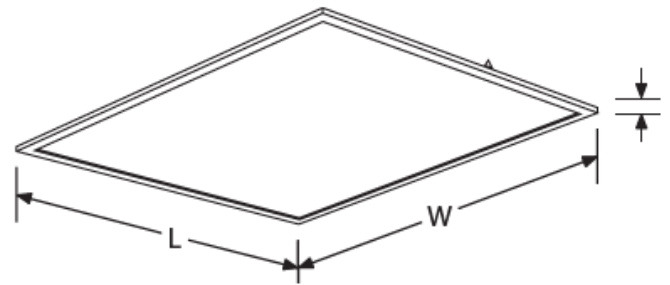

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (L x W x H)	Reference Code
26	3640	3000K	140	>80	595mm x 595mm x 32mm	LARBB0264
40	5600	3000K	140	>80	1195mm x 595mm x 32mm	LARBB0404
26	3640	4000K	140	>80	595mm x 595mm x 32mm	LARBB0264
40	5600	4000K	140	>80	1195mm x 595mm x 32mm	LARBB0404

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE