

BLADE B

LED MEDICAL

The **BLADE B MEDICAL** backlit LED Panel is designed for use in medical and healthcare facilities, delivering controlled, low-glare lighting suitable for clinical environments. Its diffused optical system ensures uniform illumination, supporting accuracy, comfort, and compliance in sensitive medical areas.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

BLADE B MEDICAL





APPLICATIONS

- Public Buildings
- Retail Lighting
- Office Lighting
- Educational Buildings

PRODUCT SPECIFICATIONS

LED Driver	External (Supplied)
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 3%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.95
Available CCT	4000K
CRI	> 93
Lifetime	Up to 50 000 hours - L70 B50
Application Temperature	-20°C to 30°C
Available Emergency	1Hr - 3Hr (remote)
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	SPCC
Finish	White
Diffuser	PS Diffuser - Honeycomb
Mounting	Recessed

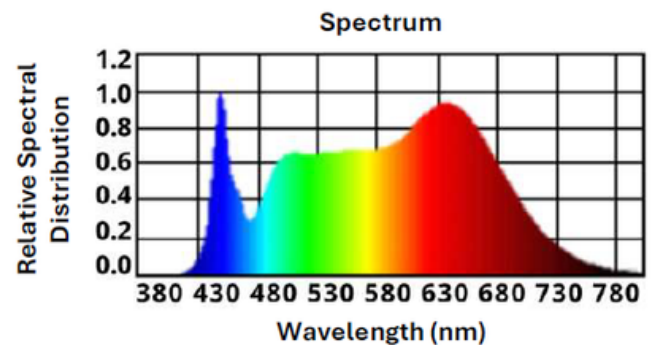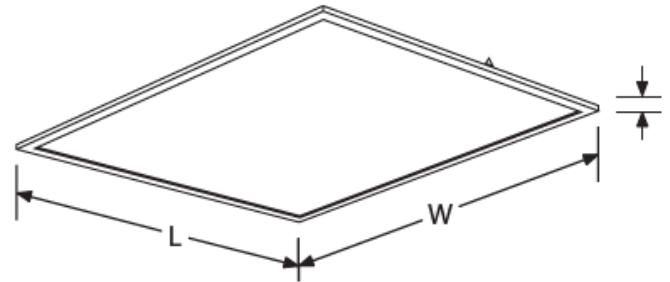

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	COI	CRI Rating	Dimensions (L x W x H)	Reference Code
32	3000	4000K	93	2.0	>93	595mm x 595mm x 32mm	LABBM0324

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE