



CUBE

LED

The **CUBE** downlight is a surface mounted tilting downlight, most suitable for spaces where a more elegant approach is needed with limited ceiling depth.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***



CUBE









APPLICATIONS

- Public Buildings
- Industrial Developments
- Hospitality
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	220-240 V
Dimming Options	TRIAC Dimming
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	3000K, 4000K
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	Ta -20°C to 45°C
Available Emergency	N/A
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	ADC12
Finish	Black
Diffuser	Aluminium 24°/36°/60°
Mounting	Surface Mount

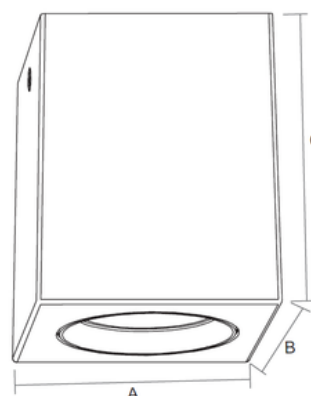

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (A, B, C, D)	Beam Angle	Reference Code
6	600	4000K	100	>80	90mm x 90mm x 110mm x 40mm	24°/36°/60°	DLCTS-006-4K
10	1000	4000K	100	>80	90mm x 90mm x 110mm x 40mm	24°/36°/60°	DLCTS-010-4K
20	2000	4000K	100	>80	115mm x 115mm x 122mm x 68mm	24°/36°/60°	DLCT6-020-4K

LIGHT ALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE