



DISK

LED

Introducing the **DISK** LED High bay light. The **DISK** is designed for optimal lighting solutions in warehousing and isle racking applications.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

DISK




APPLICATIONS

- Public Buildings
- Industrial Developments
- Commercial Developments
- Warehousing

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	Yes, 3 in 1 (0-10V, PWM, Resistor)
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	4000K, 5000K, 5700K
CRI	> 70
Lifetime	Up to 50 000 hours
Application Temperature	-15°C to 45°C
Available Emergency	1Hr - 3Hr (remote)
Warranty	5 Years - T's & C's apply
IP Rating	65
Housing Material	Die Cast Aluminium
Finish	Black
Diffuser	Optic 60/90/120 degree
Mounting	Suspended

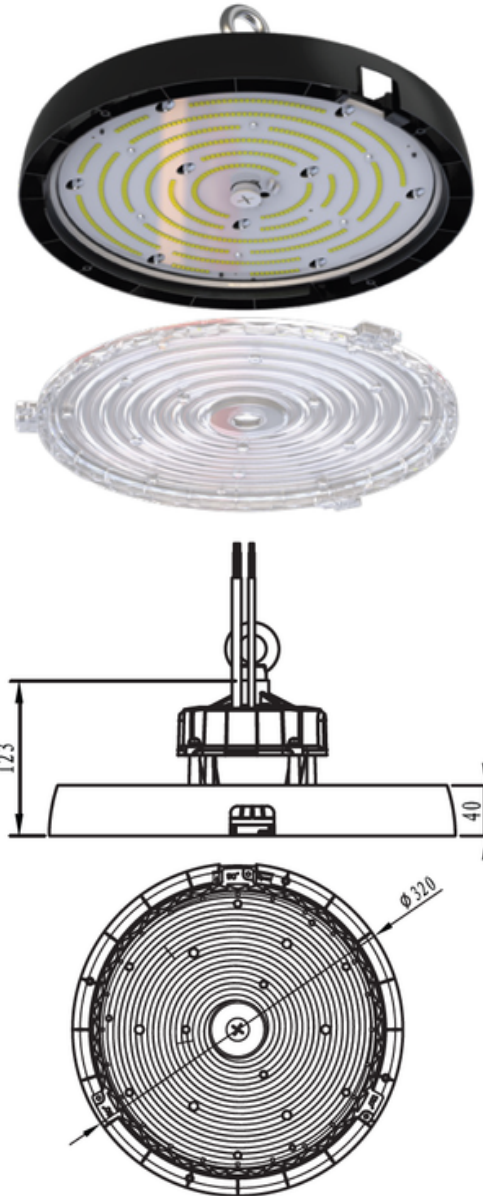

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions	Beam Angle	Reference Code
180	28800	5000K	160	>70	320mm x 123mm	90°	DLHB319-240-CCT
200	36000	5000K	180	>70	320mm x 123mm	90°	DLHB319-240-CCT
240	38400	5000K	160	>70	320mm x 123mm	90°	DLHB319-240-CCT

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE