



ELORA 3

LED

Introducing the **ELORA 3** LED emergency exit light. It is ideally suited as stand-alone self contained single-sided surface mount fittings in new or existing buildings. The LED arrangement provides a uniform illumination of the signs / legends with a high level of emergency illumination at floor level.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***



ELORA 3




APPLICATIONS

- Corridors
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	N/A
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	6000K
CRI	> 80
Lifetime	Up to 30 000 hours
Application Temperature	-10°C to 50°C
Emergency Duration	3 Hours
Warranty	1 Years - T's & C's apply
IP Rating	20
Housing Material	Mild steel
Finish	Powder Coated White
Diffuser Material	PMMA UV Stabilized
Mounting	Surface Mount

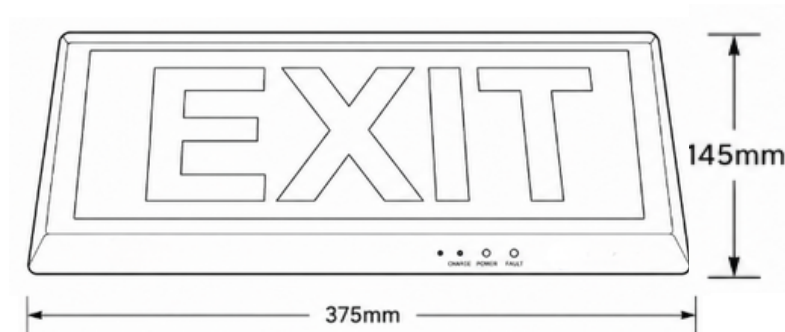

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficiency (lm/W)	CRI Rating	Driving Current	Dimensions (L x W x H)	Reference Code
2W	80	6000K	40	>80	250mA	375mm x 145mm x 28mm	LAELE3-002-6K

LIGHT ALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE