



ELUX 115

LED **SURFACE MOUNTED**

The **ELUX 115 Surface Mounted** is a sleek downlight suitable for surface mount applications, where projects lack ceiling voids. It is also more commonly used in modern residential applications where aesthetics is of importance.

ELUX 115

SURFACE MOUNTED




APPLICATIONS


- Public Buildings
- Industrial Developments
- Hospitality
- Commercial Developments
- Retail Developments
- Residential Developments

PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	220-240 V
Dimming Options	N/A
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED (COB)
Power Factor	> 0.95
Available CCT	4000K, 3500K, 3000K
CRI	> 80
Lifetime	Up to 100 000 hours
Application Temperature	Ta < 35°C
Available Emergency	1Hr - 3Hr
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Aluminium
Finish	White, Black
Diffuser	Aluminium Specular
Mounting	Surface Mount

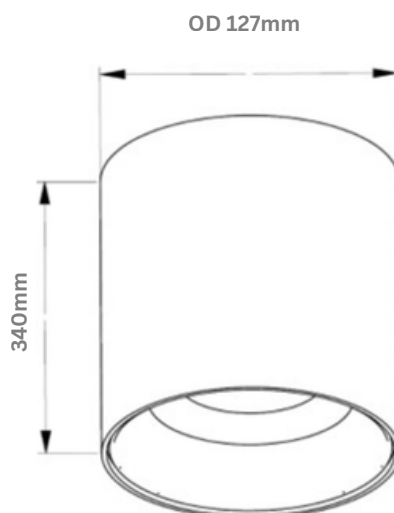

LED 20W 45° Beam

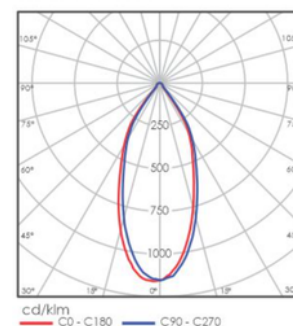

LED CURRENT (mA)	NOMINAL WATTAGE (W)	SYSTEM WATTAGE (W)	CRI 90 3000K NOMINAL FLUX (lm)	CRI 90 3000K SYSTEM FLUX (lm)	CRI 90 3500K NOMINAL FLUX (lm)	CRI 90 3500K SYSTEM FLUX (lm)	CRI 90 4000K NOMINAL FLUX (lm)	CRI 90 4000K SYSTEM FLUX (lm)
350mA	12W	15W	2001 lm	1665 lm	2052 lm	1708 lm	2130 lm	1772 lm
500mA	17W	20W	2792 lm	2322 lm	2798 lm	2327 lm	2979 lm	2477 lm
700mA	24W	25W	3568 lm	2970 lm	3640 lm	3030 lm	3963 lm	3299 lm

LIGHT ALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE