


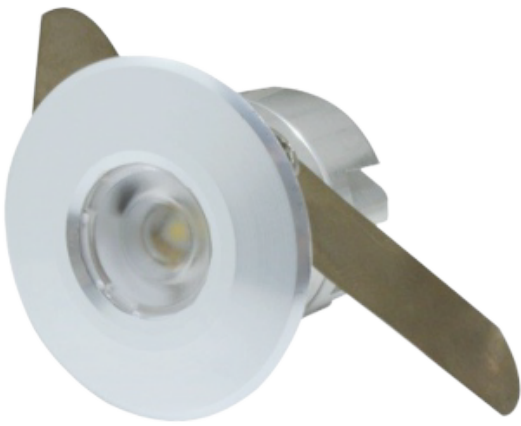

ELUX 32

LED

The **ELUX 32** is a compact recessed ceiling fitting with a powder-coated aluminium frame. Suitable for indoor use, it offers high efficiency and long lifespan, with dimming possible from six units upwards

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

ELUX 32




APPLICATIONS

- Public Buildings
- Industrial Developments
- Hospitality
- Commercial Developments
- Retail Developments
- Shopping Malls


PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	3000K, 4000K
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	Ta -10°C to 40°C
Available Emergency	N/A
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Aluminium Alloy
Finish	White, Aluminium
Diffuser	Methacrylate 36°
Mounting	Recessed

HOLE CUT OUT




Bottom View



Side View


LIGHT DISTRIBUTION

LED 1.2W 15° Beam

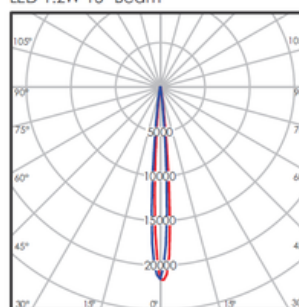

cd/klm
C0 - C180 C90 - C270

LED 1.2W 67° Beam

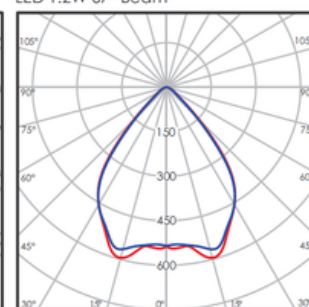

cd/klm
C0 - C180 C90 - C270

LED Current (mA)	System Wattage (W)	Dimming	Colour Temp (K)	Luminous Flux (lm)
350mA	1.45W	Dimmable (min 6 lights)	4000K	102 lm
	1.9W	Non Dimmable	3000K	95 lm

LIGHT ALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE