



EMMA M

LED

The **EMMA M** is a sleek downlight suitable for surface mount applications, where projects lack ceiling voids. It is also more commonly used in modern residential applications where aesthetics are of importance.

LIGHT **LLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***



NORT
BUSINE

EMMA M




APPLICATIONS

- Public Buildings
- Industrial Developments
- Hospitality
- Commercial Developments
- Retail Developments
- Residential Developments

PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	220-240 V
Dimming Options	N/A
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED (COB)
Power Factor	> 0.95
Available CCT	4000K, 3000K
CRI	> 80
Lifetime	Up to 100 000 hours
Application Temperature	Ta < 35°C
Available Emergency	1Hr - 3Hr
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Aluminium
Finish	White, bLACK
Diffuser	Aluminium Specular
Mounting	Recessed

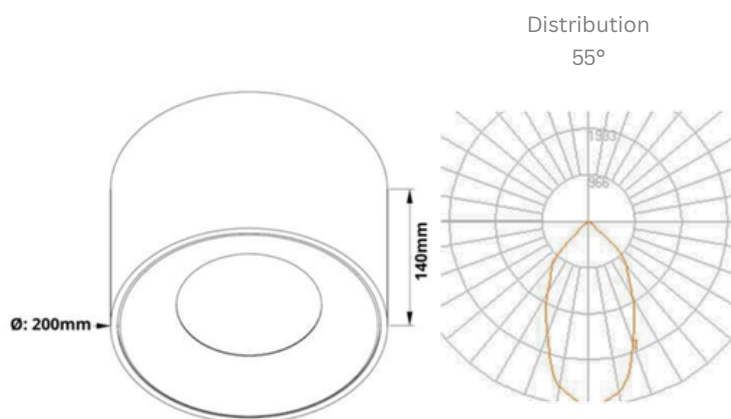

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (A x C)	Beam Angle	Reference Code
13	1600	4000K	123	>80	200mm x 140mm	55°	DLEM-013-4K
13	1560	3000K	123	>80	200mm x 140mm	55°	DLEM-013-3K
18	2250	4000K	125	>80	200mm x 140mm	55°	DLEM-018-4K
18	2200	3000K	125	>80	200mm x 140mm	55°	DLEM-018-3K
26	3085	4000K	119	>80	200mm x 140mm	55°	DLEM-026-4K
26	3000	3000K	119	>80	200mm x 140mm	55°	DLEM-026-3K
32	3690	4000K	115	>80	200mm x 140mm	55°	DLEM-032-4K
32	3590	3000K	115	>80	200mm x 140mm	55°	DLEM-032-3K

LIGHT ALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE