

RECESSED



EVO

LED

Introducing the **EVO** LED Panel. With its aesthetic design with elegance in mind, the **EVO** is perfect for office applications. Available in 600x600 and 1200x600 format for suspended ceiling systems.

LIGHT**A**LLIANCE

Projects (PTY) Ltd.

Partners in *Lighting Solutions*

RECESSED

EVO




APPLICATIONS

- Public Buildings
- Retail Lighting
- Office Lighting
- Educational Buildings

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	4000K, OTHER
CRI	> 80
Lifetime	Up to 50 000 hours - L80 B10
Application Temperature	-10°C to 45°C
Available Emergency	1Hr - 3Hr (remote)
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Mild Steel
Finish	White
Diffuser	Lumeio Glacier UV Stabilized
Mounting	Recessed
Surge Protection	4kv Surge protection

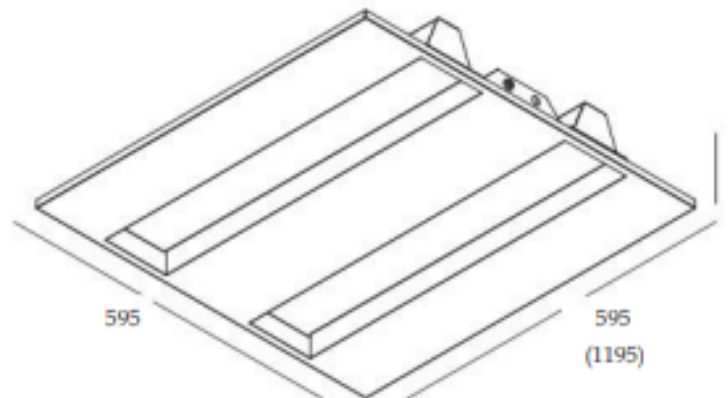

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions	THD (%)	Reference Code
24	4175	4000K	174	>80	595mm x 595mm	<15%	LARE0244-2C
36	6050	4000K	168	>80	595mm x 595mm	<15%	LARE0364-2C
48	8350	4000K	174	>80	1195mm x 595mm	<15%	LARE0484-2C
72	12100	4000K	168	>80	1195mm x 595mm	<15%	LARE0724-2C
37	6450	4000K	175	>80	595mm x 595mm	<15%	LARE0374-3C
52	8750	4000K	168	>80	595mm x 595mm	<15%	LARE0524-3C
74	12875	4000K	174	>80	1195mm x 595mm	<15%	LARE0744-3C
108	18100	4000K	168	>80	1195mm x 595mm	<15%	LARE1084-3C

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE