



## FADER W

LED

The **FADER W** is an efficient solution for surface/trunking mount applications such as parking garages, stores, stairways and walkways.

**LIGHT** **LLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

# FADER W





## APPLICATIONS

- Public Buildings
- Industrial Developments
- Commercial Developments

## PRODUCT SPECIFICATIONS

|                         |                              |
|-------------------------|------------------------------|
| LED Driver              | Internal                     |
| Input Voltage           | 220-240 V                    |
| Dimming Options         | DALI, Other                  |
| Flicker Rating          | < 5%                         |
| Low Ripple Current      | Yes                          |
| Light Source            | LED                          |
| Power Factor            | > 0.95                       |
| Available CCT           | 4000K, OTHER                 |
| CRI                     | > 80                         |
| Lifetime                | L80 B10 - Up to 50 000 hours |
| Application Temperature | Ta < 35°C                    |
| Available Emergency     | 1-3hr EMG backup             |
| Warranty                | 5 Years - T's & C's apply    |
| IP Rating               | 20                           |
| Housing Material        | Mild Steel - Powder Coated   |
| Finish                  | White                        |
| Diffuser                | PMMA Semi Diffused           |
| Mounting                | Surface, P2000               |

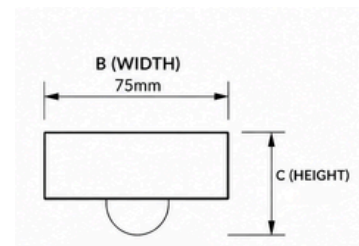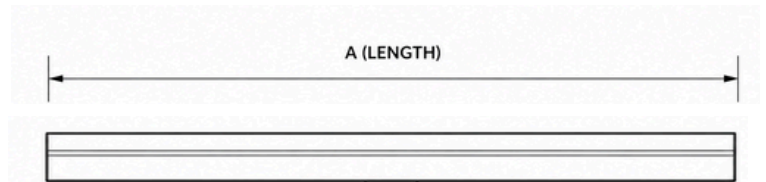

| Luminaire Wattage | Output (Lumens) | Colour Temperature | Efficacy (lm/W) | CRI Rating | Dimensions (A x B x C) | Reference Code |
|-------------------|-----------------|--------------------|-----------------|------------|------------------------|----------------|
| 11                | 1800            | 4000K              | 164             | >80        | 592mm x 75mm x 68mm    | LAIFW-011-4K   |
| 18                | 2860            | 4000K              | 159             | >80        | 592mm x 75mm x 68mm    | LAIFW-018-4K   |
| 27                | 4420            | 4000K              | 164             | >80        | 1152mm x 75mm x 68mm   | LAIFW-027-4K   |
| 40                | 6400            | 4000K              | 160             | >80        | 1152mm x 75mm x 68mm   | LAIFW-040-4K   |
| 49                | 7930            | 4000K              | 162             | >80        | 1432mm x 75mm x 68mm   | LAIFW-049-4K   |
| 58                | 9160            | 4000K              | 158             | >80        | 1432mm x 75mm x 68mm   | LAIFW-058-4K   |

# LIGHT ALLIANCE

Projects (PTY) Ltd.

Partners in *Lighting Solutions*

### Disclaimer:

Component manufacturer data is used and could vary +-10%  
We reserve the right to amend or change data without prior notification.  
E&OE