



FAITH

LED

The **FAITH** downlight is an Anti-Glare recessed downlight, suitable for GU10 LED lamps.

LIGHTALLIANCE

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

DOWNLIGHTS

FAITH




APPLICATIONS

- Public Buildings
- Industrial Developments
- Hospitality
- Commercial Developments
- Retail Developments
- Shopping Malls


PRODUCT SPECIFICATIONS

LED Driver	N/A
Input Voltage	220-240 V
Dimming Options	None
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	GU10
Power Factor	> 0.9
Available CCT	2700K, 3000K, 4000K
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	Ta -10°C to 40°C
Available Emergency	N/A
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Aluminium
Finish	Silver, White, Black, Gold
Diffuser	N/A
Mounting	Recessed

Round

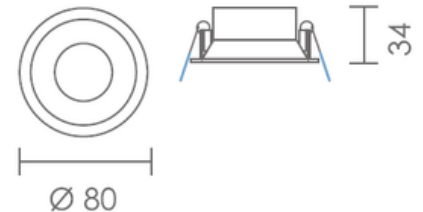

Square

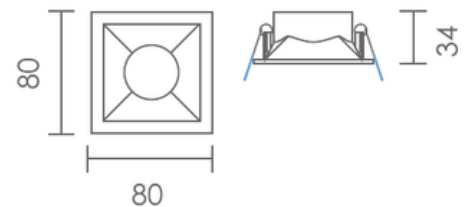

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (A x C)	Cutout Size	Reference Code
5	530	2700K	106	>80	OD 80mm x 34mm	70mm	LAFR-005-27K-W

LIGHT ALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE