



HOOP-M

LED

The **HOOP-M** is a stylish bulkhead with modern features and an opal polycarbonate UV stabilised diffuser.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***



HOOP-M




APPLICATIONS

- Public Buildings
- Industrial Developments
- Hospitality
- Commercial Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.95
Available CCT	4000K, 3000K
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	Ta < 35°C
Available Emergency	1Hr - 3Hr
Warranty	3 Years - T's & C's apply
IP Rating	54
Housing Material	Glass filled Polymer
Finish	Black or White
Diffuser	PMMA Opal Diffuser - UV Stable
Mounting	Surface Mount

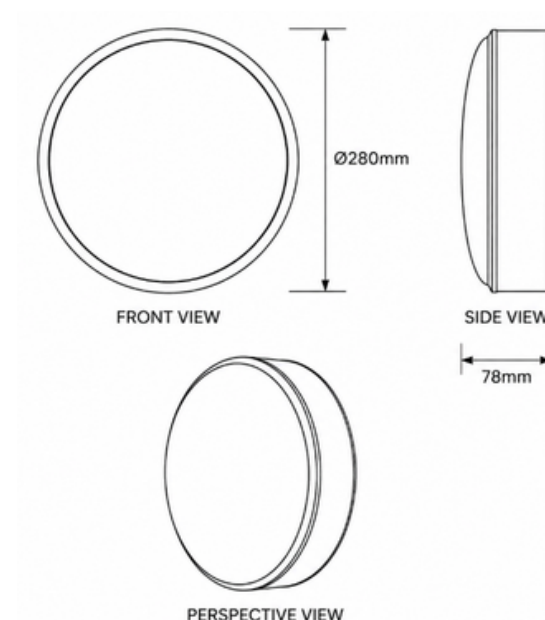

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (Dia x H)	Beam Angle	Reference Code
15	1500	3000K	100	>80	280mm x 78mm	90°	BHM-015-3K
15	1620	4000K	100	>80	280mm x 78mm	90°	BHM-015-4K

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in *Lighting Solutions*

Disclaimer:

Component manufacturer data is used and could vary +-10%

We reserve the right to amend or change data without prior notification.
E&OE