

HAZARDOUS



IGNITE

LED

The **IGNITE** is designed for
Hazardous areas such as **Zone 1,**
2, 21 & 22

LIGHT**A****LLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

HAZARDOUS

IGNITE




APPLICATIONS

- Hazardous Areas
- Flammable Gas Areas
- Explosive Substance Areas
- Volatile Liquid areas

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	None
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	4000K, 3000K
CRI	> 80
Lifetime	L80, B10 - Up to 50 000 hours
Application Temperature	-30°C to 400°C
Available Emergency	1Hr - 3Hr
Warranty	5 Years - T's & C's apply
IP Rating	66
Housing Material	GRP Glass Fibre Reinforced polyester
Finish	Grey
Diffuser	Clear or Frosted polycarb diffuser
Mounting	Surface Mount

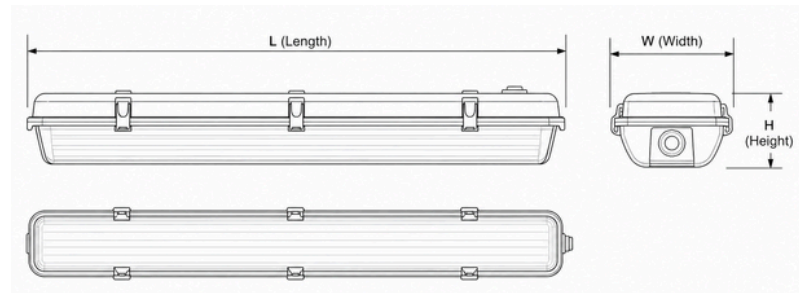

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions L x W x H	Beam Angle	Reference Code
36	3312	4000K	92	>80	794mm x 176mm x 145mm	90°	LASPI-036-4K
51	4692	4000K	92	>80	794mm x 176mm x 145mm	90°	LASPI-051-4K
67	6365	4000K	95	>80	1400mm x 176mm x 145mm	90°	LASPI-067-4K
98	9212	4000K	94	>80	1400mm x 176mm x 145mm	90°	LASPI-098-4K

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE