

INDUSTRIAL



INTENSE 2R

LED

The **INTENSE 2R** is a linear LED fitting most suitable for commercial and industrial applications as well as high racking between shelving. Available in multiple mounting configurations to tailor to any need.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

INTENSE 2R




APPLICATIONS


- Public Buildings
- Industrial Developments
- Commercial Developments

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.95
Available CCT	4000K, OTHER
CRI	> 80
Lifetime	L80B10 > 70 000 Hrs
Application Temperature	Ta < 35°C
Available Emergency	None
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Mild Steel - Powder Coated
Finish	Black
Diffuser	PC Diffuser 120°
Mounting	Surface, Suspended



P2000 Mounted

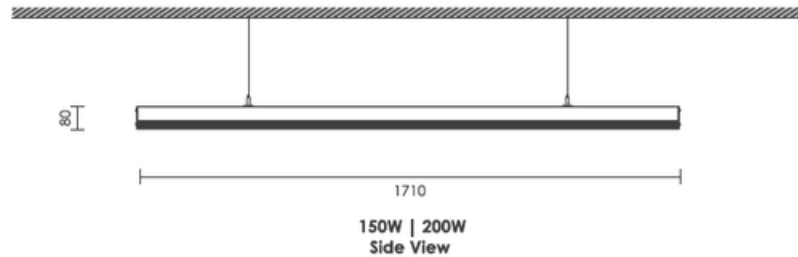

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	LED Current (mA)	Dimensions (L x W x H)	Reference Code
125	18895	4000K	151	>80	1050mA	1141mm x 65mm x 80mm	LAI2R-125-120-4K
145	26740	4000K	184	>80	850mA	1710mm x 65mm x 80mm	LAI2R-145-120-4K
200	30704	4000K	153	>80	1200mA	1710mm x 65mm x 80mm	LAI2R-200-120-4K
250	37790	4000K	151	>80	1050mA	2250mm x 65mm x 80mm	LAI2R-250-120-4K

LIGHT ALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE