



JULIA IP

LED

The **JULIA IP** provides a selection of lumen outputs and reflector choices tailored for diverse recessed lighting needs, spanning from ambient to accent lighting applications. With its uprated IP44 rating, the JULIA IP is rated splash proof.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

JULIA IP




APPLICATIONS

- Public Buildings
- Industrial Developments
- Hospitality
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED (COB)
Power Factor	> 0.95
Available CCT	4000K, 3000K
CRI	> 80
Lifetime	Up to 100 000 hours
Application Temperature	Ta < 35°C
Available Emergency	1Hr - 3Hr
Warranty	5 Years - T's & C's apply
IP Rating	44
Housing Material	Aluminium
Finish	White
Diffuser	Aluminium Specular
Mounting	Recessed

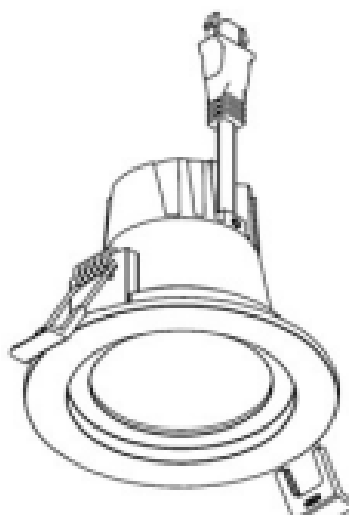

82mm

H: 76mm

Ø: 92mm

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (A x C)	Cutout Size	Beam Angle	Reference Code
9	1510	4000K	168	>90	103mm x 76mm	82mm	60°	DLJT-009-4K
9	1430	3000K	159	>90	103mm x 76mm	82mm	60°	DLJT-009-3K
13	1960	4000K	151	>90	103mm x 76mm	82mm	60°	DLJT-013-4K
13	1910	3000K	147	>90	103mm x 76mm	82mm	60°	DLJT-013-3K

LIGHT ALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE