


DOWNLIGHTS

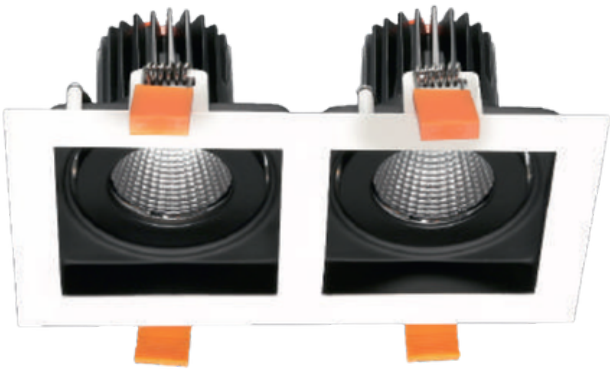

KYLIE 2

LED

The stylish **KYLIE** range recessed downlights has a sleek design with the light source recessed back to reduce glare, perfect for lighting shopping malls.


LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions



KYLIE 2

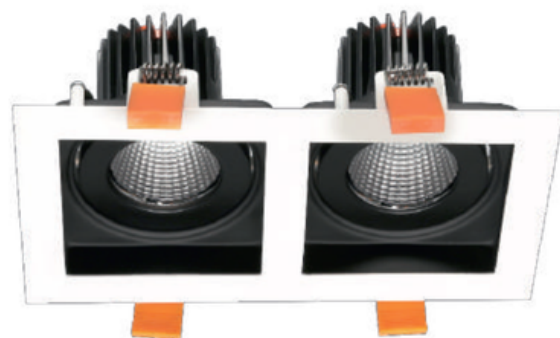


APPLICATIONS


- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED (COB)
Power Factor	> 0.95
Available CCT	4000K, 3000K
CRI	> 80
Lifetime	Up to 80 000 hours
Application Temperature	Ta < 35°C
Available Emergency	1Hr - 3Hr
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Aluminium
Finish	White, Black
Diffuser	Aluminium Reflector
Mounting	Recessed

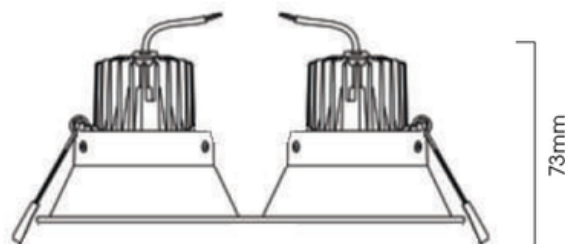

115mm x 185mm



Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (A x C)	Cutout Size	Beam Angle	Reference Code
2 x 10	2 x 895	4000K	90	>80	115mm x 185mm x 73mm	90mm x 170mm	45°	LADLK2-010-4K
2 x 10	2 x 895	3000K	90	>80	115mm x 185mm x 73mm	90mm x 170mm	45°	LADLK2-010-3K

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE