



LARA LED MINI SM

The stylish **LARA MINI** recessed downlight has a sleek design with a recessed LED light source reducing glare. It's UGR <19 rating makes the **LARA MINI** suitable for retail and office lighting.



LARA MINI SM




APPLICATIONS


- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED (COB)
Power Factor	> 0.95
Available CCT	4000K, 3000K
CRI	> 90
Lifetime	Up to 80 000 hours
Application Temperature	Ta < 35°C
Available Emergency	1Hr - 3Hr
Warranty	5 Years - T's & C's apply
IP Rating	44
Housing Material	Aluminium
Finish	White
Diffuser	Specular Reflector
Mounting	Surface Mount



<---100mm--->

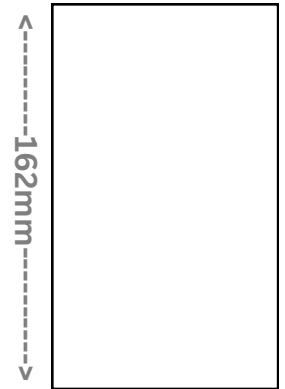

<---162mm--->

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (A x B x C)	Beam Angle	Reference Code
10	1080	4000K	108	>90	100mm x 100mm x 162mm	28°	DLMS361-4-010-4K
10	1080	3000K	108	>90	100mm x 100mm x 162mm	28°	DLMS361-4-010-3K