


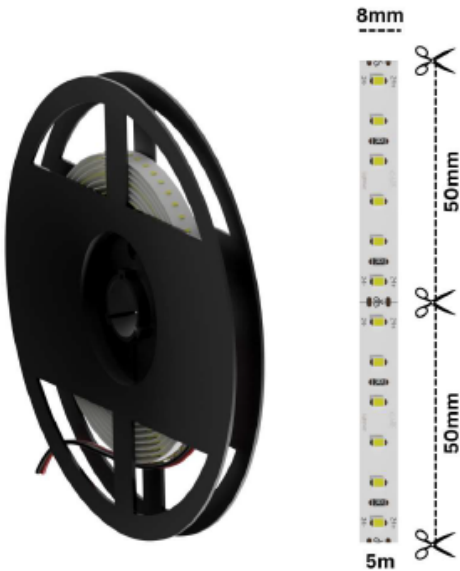

LED TAPE

24V - 14.4W/M

LED

Introducing the **14.4W/m LED Tape**, delivering bright, reliable illumination for architectural, commercial and residential applications where higher light output is required.

LIGHT ALLIANCE

Projects (PTY) Ltd.

Partners in *Lighting Solutions*

LED TAPE

24V - 14.4W/M




APPLICATIONS

- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	24V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED Tape
Power Factor	> 0.9
Available CCT	4000K
CRI	> 90
Lifetime	Up to 30 000 hours
Application Temperature	-5°C to 40°C
Available Emergency	N/A
Warranty	5 Years - T's & C's apply
IP Rating	20
LED Pitch	8.33mm
Min bend Diameter	Ø 60mm
Adhesive	High thermal 3M
Mounting	Surface Mount

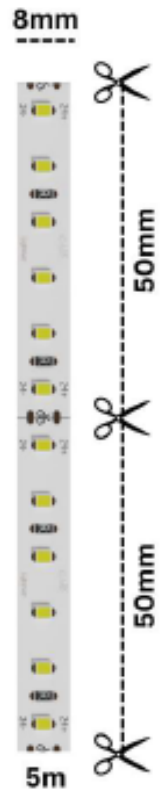

Luminaire W/meter	Output (Lumens)	Colour Temperature	Efficiency (lm/W)	CRI Rating	LED Source	Voltage	Reference Code
14.4	1587	3000K	110	>90	LED Tape	24V	LALT-14.4-24V-3K
14.4	1650	4000K	114	>90	LED Tape	24V	LALT-14.4-24V-4K

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE