

LED TAPE

24V - 4.8W/M

LED

Introducing the **4.8W/m LED Tape**, a versatile and energy-efficient lighting solution for a wide range of architectural, decorative and accent lighting applications. It provides reliable, consistent illumination with excellent flexibility, making it ideal for both residential and commercial installations.

LIGHT ALLIANCE

Projects (PTY) Ltd.

Partners in **Lighting Solutions**



LED TAPE

24V - 4.8W/M




APPLICATIONS

- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	24V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED Tape
Power Factor	> 0.9
Available CCT	3000K, 4000K
CRI	> 80
Lifetime	Up to 30 000 hours
Application Temperature	-5°C to 40°C
Available Emergency	N/A
Warranty	3 Years - T's & C's apply
IP Rating	20
LED Pitch	16.66mm
Min bend Diameter	Ø 60mm
Adhesive	High thermal 3M
Mounting	Surface Mount

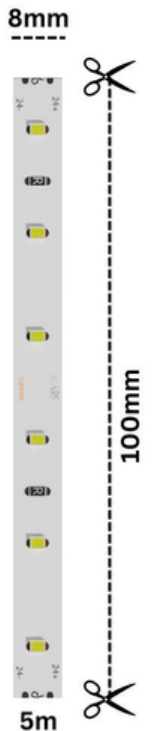

Luminaire W/meter	Output (Lumens)	Colour Temperature	Efficiency (lm/W)	CRI Rating	LED Source	Voltage	Reference Code
4.8	480	3000K	100	>80	LED Tape	24V	LALT-4.8-24V-3K
4.8	520	4000K	108	>80	LED Tape	24V	LALT-4.8-24V-4K

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE