



LUCK DOUBLE LED

The **LUCK DOUBLE** is a decorative, stylish, surface or suspended linear LED luminaire with a wide range of light distribution, length format and output options for retail.



LUCK

DOUBLE




APPLICATIONS

- Retail Developments
- Industrial Developments
- Hospitality

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	Dali, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.95
Available CCT	4000K, 3000K
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	Ta < 35°C
Available Emergency	1Hr - 3Hr
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Mild Steel, Powder Coated
Finish	Black
Diffuser	PMMA Lens
Mounting	Surface or P2000

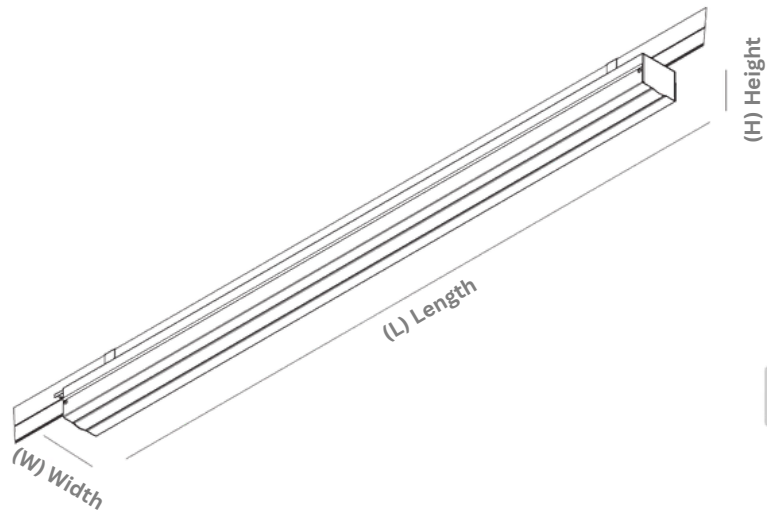

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (L x W x H)	Beam Angle	Reference Code
46 / 15	8110 / 2700	4000K	176 / 180	>80	1125mm x 75mm x 75mm	DASY / ASY	LAOK-4615-4K
57 / 19	9640 / 3200	4000K	169 / 169	>80	1405mm x 75mm x 75mm	DASY / ASY	LAOK-5719-4K
65 / 21	10530 / 3360	4000K	162 / 160	>80	1685mm x 75mm x 75mm	DASY / ASY	LAOK-6521-4K

LIGHT ALLIANCE

Projects (PTY) Ltd.
Partners in **Lighting Solutions**

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE