

DOWNLIGHTS



LYNN

LED

The **LYNN** is a refined low-glare interior downlight crafted from aluminium and designed for GU10 LED lamps. Available in both fixed and adjustable options, it offers flexibility and comfort in modern lighting design. Rated IP20 and Class I, **LYNN** is ideal for residential and commercial applications.

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in *Lighting Solutions*



DOWNLIGHTS

LYNN




APPLICATIONS

- Public Buildings
- Industrial Developments
- Residential
- Commercial

PRODUCT SPECIFICATIONS

LED Driver	N/A
Input Voltage	220-240 V
Dimming Options	N/A
Flicker Rating	N/A
Low Ripple Current	N/A
Light Source	GU10 7.5W
Power Factor	> 0.7
Available CCT	3000K, 4000K
CRI	90
Lifetime	Up to 50 000 hours
Application Temperature	-10°C to 35°C
Available Emergency	None
Warranty	3 Years - T's & C's apply
IP Rating	20
Housing Material	Aluminium
Finish	Black, White, Gold
Diffuser	None
Mounting	Surface Mount

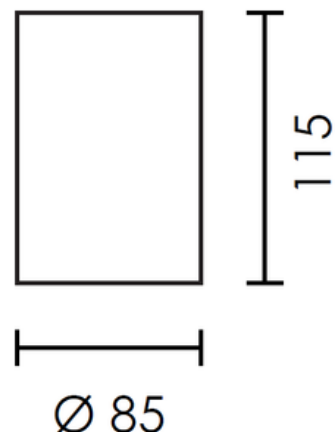

Luminaire Wattage	Output (Lumens)	Colour Temperature	CRI	Frequency	Beam Angle	Reference Code
7.5	650	3000K	90	50/60 Hz	36°	LALSM-007-3K
7.5	675	4000K	90	50/60 Hz	36°	LALSM-007-4K

LIGHT ALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE