


OUTDOOR

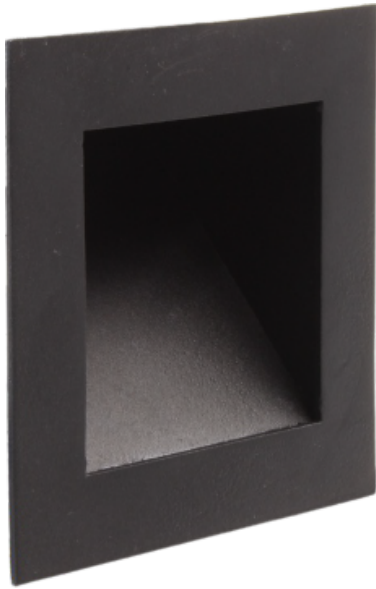

MILA

LED

Introducing the **MILA** decorative footlight, designed to provide subtle, low-level illumination while adding a stylish architectural element to any space. Its elegant design makes the **MILA** ideal for pathways, stairways and feature lighting applications.

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in *Lighting Solutions*



MILA





APPLICATIONS

- Public Buildings
- Industrial Developments
- Parking lots
- Commercial Developments

PRODUCT SPECIFICATIONS


LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	N/A
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	4000K, 3000K
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	-10°C to 35°C
Available Emergency	None
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	2mm 304 Stainless steel
Finish	Black, White
Diffuser	High Impact Opal acrylic
Mounting	Recessed Wall mount

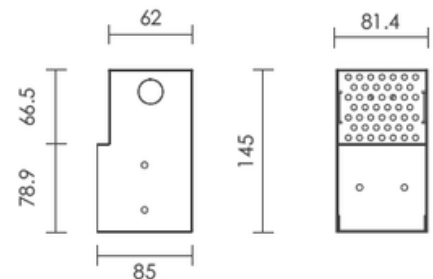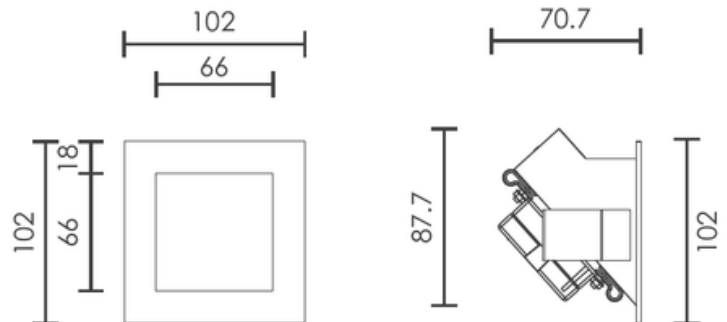

LED Samsung LH561B+

LED CURRENT (mA)	SYSTEM WATTAGE (W)	COLOUR TEMP (K)	NOMINAL FLUX (lm)
350mA	2W	4000K	197 lm
		3000K	185 lm

LED 2W

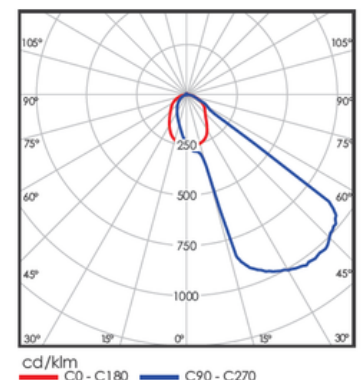

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE