




NEON FLEX

LED

Introducing the **NEON FLEX** linear LED tape. The **NEON FLEX** can be configured for multiple continuous runs, and is flexible for smart applications on contours.

NEON FLEX

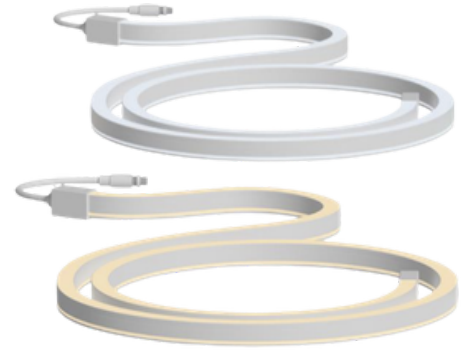


APPLICATIONS


- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	DC 24V
Dimming Options	N/A
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED Tape
Power Factor	> 0.9
Available CCT	3000K, 4000K, Other
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	-10°C to 50°C
Available Emergency	N/A
Warranty	5 Years - T's & C's apply
IP Rating	65
Housing Material	N/A
Finish	N/A
Diffuser Material	PMMA UV Stabilized
Mounting	Surface Mount



Luminous Surface



Side Entry




Top Entry



Back Entry

Mounting Options



1m Profile / Mounting Clips



Flexi Mount

Luminaire W/meter	Output (Lumens)	Colour Temperature	Efficiency (lm/W)	CRI Rating	LED Source	Voltage	Reference Code
9.6	648	3000K	67.5	>80	LED Tape	24V	LANFL9.6-SO-3K
9.6	702	5000K	67.5	>80	LED Tape	24V	LANFL9.6-SO-5K

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%

We reserve the right to amend or change data without prior notification.
E&OE