



NORA

LED

The **NORA** downlight is an excellent downlight for applications where higher light levels are required. The **NORA** is suitable for most retail, office and shopping malls.

LIGHT **LLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***



NORA



APPLICATIONS

- Public Buildings
- Industrial Developments
- Hospitality
- Commercial Developments
- Retail Developments
- Shopping Malls



PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED (COB)
Power Factor	> 0.95
Available CCT	4000K, 3000K
CRI	> 80
Lifetime	Up to 100 000 hours
Application Temperature	Ta < 35°C
Available Emergency	1Hr - 3Hr
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Aluminium
Finish	White
Diffuser	Aluminium Specular
Mounting	Recessed



108mm

Beam Angle

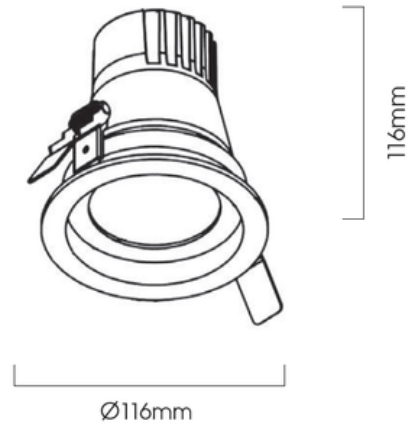

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Dimensions	Reference Code
12	1634	4000K	136	>80	Ø116mm x 116mm	LADLN-012-4K
12	1591	3000K	133	>80	Ø116mm x 116mm	LADLN-012-3K
17	2274	4000K	134	>80	Ø116mm x 116mm	LADLN-017-4K
17	2216	3000K	130	>80	Ø116mm x 116mm	LADLN-017-3K
24	3078	4000K	128	>80	Ø116mm x 116mm	LADLN-024-4K
24	2999	3000K	125	>80	Ø116mm x 116mm	LADLN-024-3K
30	3642	4000K	121	>80	Ø116mm x 116mm	LADLN-030-4K
30	3550	3000K	118	>80	Ø116mm x 116mm	LADLN-030-3K

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE