


LINEAR

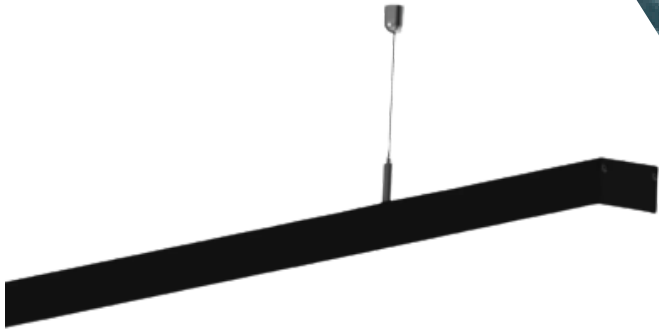

PULSE 50 SUSPENDED

LED

Introducing the **PULSE 50 Surface** linear LED light. The **PULSE 50 Surface** can be configured for multiple continuous runs, also angles.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***



PULSE 50 SUSPENDED




APPLICATIONS


- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS


LED Driver	Remote
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	3000K, 4000K, Other
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	-10°C to 50°C
Available Emergency	1-3 Hours
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Extruded Aluminium
Finish	Natural, White, Black
Diffuser Material	PMMA UV Stabilized
Mounting	Suspended

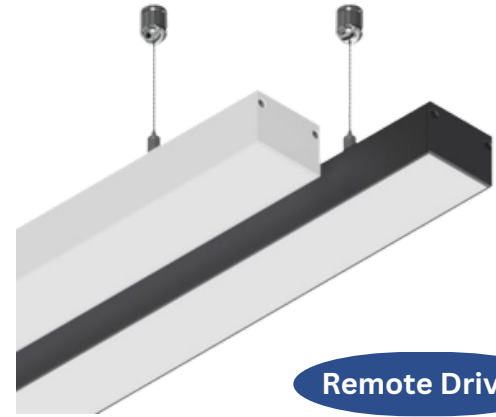

Remote Driver

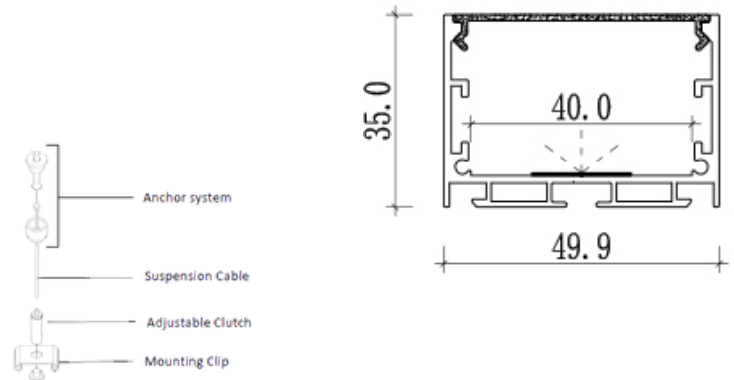

Suspension Kit Mounting Illustration

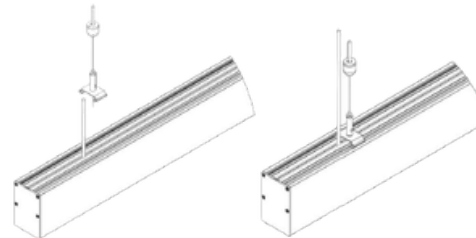

Simple to install

1. Attach the suspension kit to the mounting clip and secure the suspension kits onto a solid surface.
2. click on mounting the clip onto the top side of the profile.
3. Power must be switched off during the installation of the luminaire.

Luminaire W/meter	Output (Lumens)	Colour Temperature	Efficiency (lm/W)	CRI Rating	LED Warranty	Voltage	Reference Code
4.8	480	3000K	100	>80	3 Years	24V	LAP50SP-004-SO-3K
4.8	520	4000K	108	>80	3 Years	24V	LAP50SP-004-SO-4K
8.7	1390	4000K	159	>80	5 Years	24V	LAP50SP-008-SO-4K
10.5	970	3000K	92	>90	5 Years	24V	LAP50SP-010-SO-3K
10.5	1005	4000K	99	>90	5 Years	24V	LAP50SP-010-SO-4K
14.4	1587	3000K	110	>90	5 Years	24V	LAP50SP-014-SO-3K
14.4	1650	4000K	114	>90	5 Years	24V	LAP50SP-014-SO-4K
14.4 HB	2015	4000K	140	>90	5 Years	24V	LAP50SP-014-HB-4K

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE