



QUAD

LED

The **QUAD** is a simple, yet elegant light fitting. With it's IP65 rating, applications can be for internal or external applications.



QUAD





APPLICATIONS

- Public Buildings
- Industrial Developments
- Hospitality
- Commercial Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.95
Available CCT	4000K, 3000K
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	Ta < 35°C
Available Emergency	1Hr - 3Hr
Warranty	5 Years - T's & C's apply
IP Rating	65
Housing Material	Die Cast Aluminium
Finish	Black or White
Diffuser	PMMA Opal Diffuser - UV Stable
Mounting	Surface Mount

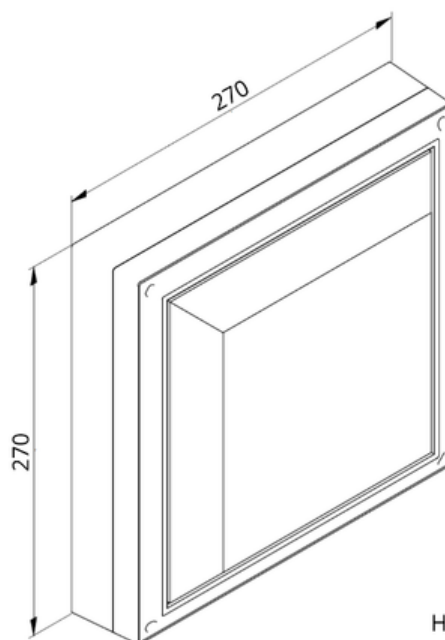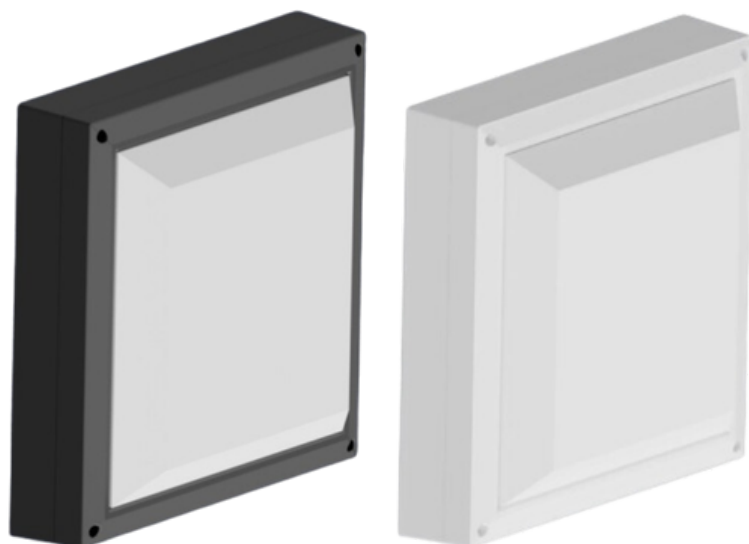

HEIGHT: 80

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (A x C)	Height	Beam Angle	Reference Code
12	2180	4000K	177	>80	270mm x 270mm	80mm	70°	BHQ-012-4K
12	2025	3000K	164	>80	270mm x 270mm	80mm	70°	BHQ-012-3K
18	3000	4000K	165	>80	270mm x 270mm	80mm	70°	BHQ-018-4K
18	2790	3000K	155	>80	270mm x 270mm	80mm	70°	BHQ-018-3K

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE