



QUINN

LED

The **QUINN** downlight is an excellent downlight for applications where higher light levels are required. The **QUINN** is suitable for most retail, office and commercial applications.

QUINN




APPLICATIONS

- Public Buildings
- Industrial Developments
- Hospitality
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED (COB)
Power Factor	> 0.95
Available CCT	4000K, 3000K
CRI	> 80
Lifetime	Up to 100 000 hours
Application Temperature	Ta < 35°C
Available Emergency	1Hr - 3Hr
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Aluminium
Finish	White
Diffuser	Aluminium Specular
Mounting	Recessed

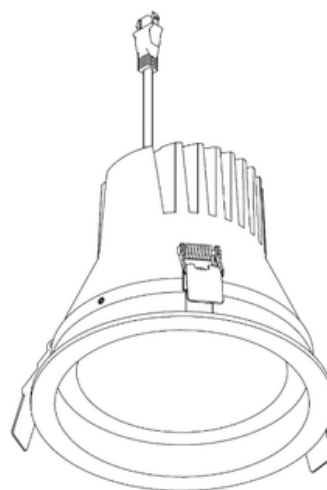

H: 155mm
Ø: 170mm



Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (A x C)	Cutout Size	Beam Angle	Reference Code
28	5070	4000K	181	>80	170mm x 155mm	155mm	60°	DLQ-028-4K
28	4920	3000K	176	>80	170mm x 155mm	155mm	60°	DLQ-028-3K
35	6180	4000K	176	>80	170mm x 155mm	155mm	60°	DLQ-035-4K
35	6000	3000K	171	>80	170mm x 155mm	155mm	60°	DLQ-035-3K
40	7000	4000K	173	>80	170mm x 155mm	155mm	60°	DLQ-040-4K
40	6800	3000K	168	>80	170mm x 155mm	155mm	60°	DLQ-040-3K
48	4700	4000K	169	>80	170mm x 155mm	155mm	60°	DLQ-048-4K
48	8060	3000K	164	>80	170mm x 155mm	155mm	60°	DLQ-048-3K

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE