



ROGUE WIRED FOR LED TUBE

The **ROGUE** is a linear moisture proof LED fitting most suitable for cold rooms and clean room applications.

ROGUE

WIRED FOR LED TUBE




APPLICATIONS

- Public Buildings
- Industrial Developments
- Commercial Developments

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	None
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED Tube
Power Factor	> 0.95
Available CCT	4000K, OTHER
Lamp Base	T8 LED
Lifetime	N/A
Application Temperature	Ta < 35°C
Available Emergency	None
Warranty	3 Years - T's & C's apply
IP Rating	65
Housing Material	Shockproof Polycarbonate
Finish	Grey
Diffuser	PMMA UV Stabilized
Mounting	Surface mount

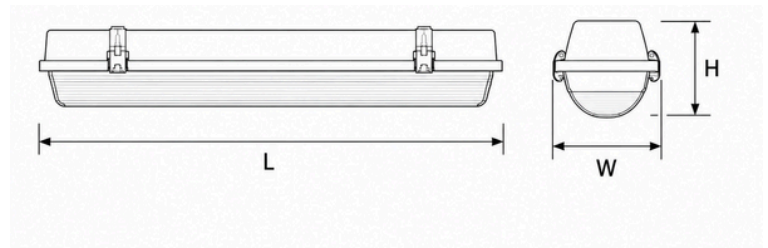

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions	IP Rating	Reference Code
18W	N/A	4000K	N/A	>80	105mm x 60mm x 1260mm	IP65	LAIR2X4FTLED
22W	N/A	4000K	N/A	>80	105mm x 60mm x 1560mm	IP65	LAIR2X5FTLED

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in *Lighting Solutions*

Disclaimer:

Component manufacturer data is used and could vary +-10%

We reserve the right to amend or change data without prior notification.
E&OE