



ROGUE

LED

The **ROGUE** is a linear moisture proof LED fitting most suitable for cold rooms and clean room applications.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***



ROGUE




APPLICATIONS

- Public Buildings
- Industrial Developments
- Commercial Developments

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.95
Available CCT	4000K, OTHER
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	Ta < 35°C
Available Emergency	None
Warranty	5 Years - T's & C's apply
IP Rating	65
Housing Material	Shockproof Polycarbonite
Finish	Grey
Diffuser	PMMA UV Stabilized
Mounting	Surface mount

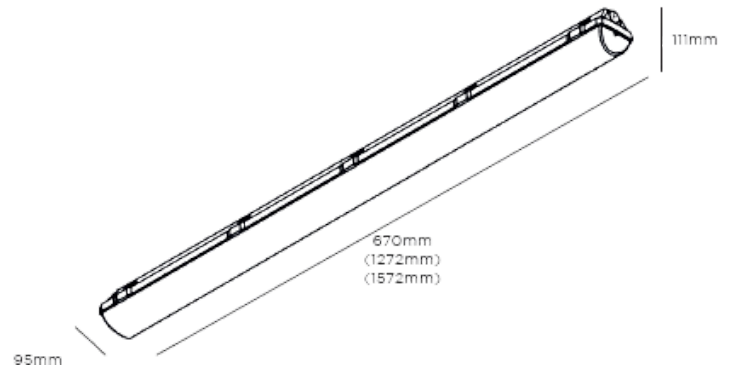

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Dimensions	Reference Code
22	4 282	4000K	174	>80	1272mm X 95mm X 111mm	LAIR-022-4K
32	5 882	4000K	164	>80	1272mm X 95mm X 111mm	LAIR-032-4K
37	6 640	4000K	161	>80	1272mm X 95mm X 111mm	LAIR-037-4K
48	8 154	4000K	154	>80	1272mm X 95mm X 111mm	LAIR-048-4K
28	5 365	4000K	171	>80	1572mm X 95mm X 111mm	LAIR-028-4K
40	7 344	4000K	164	>80	1572mm X 95mm X 111mm	LAIR-040-4K
46	8 297	4000K	162	>80	1572mm X 95mm X 111mm	LAIR-046-4K
58	10 202	4000K	159	>80	1572mm X 95mm X 111mm	LAIR-058-4K

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE