

OUTDOOR



SHELL

LED

Introducing the **SHELL** post top. It is IP66 rated for durable weather resistance, and can be used indoor as well as outdoor.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***



OUTDOOR

SHELL




APPLICATIONS

- Public Buildings
- Industrial Developments
- Parking lots
- Commercial Developments

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	On request
Flicker Rating	>0.9
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.8
Available CCT	3000K, 4000K
CRI	90
Lifetime	Up to 100 000 hours
Application Temperature	-10°C to 30°C
Available Emergency	None
Warranty	5 Years - T's & C's apply
IP Rating	66
Housing Material	LM6 Die cast aluminium
Finish	Black
Diffuser	Injection moulded - Acrylonitrile butadiene styrene
Mounting	Post top

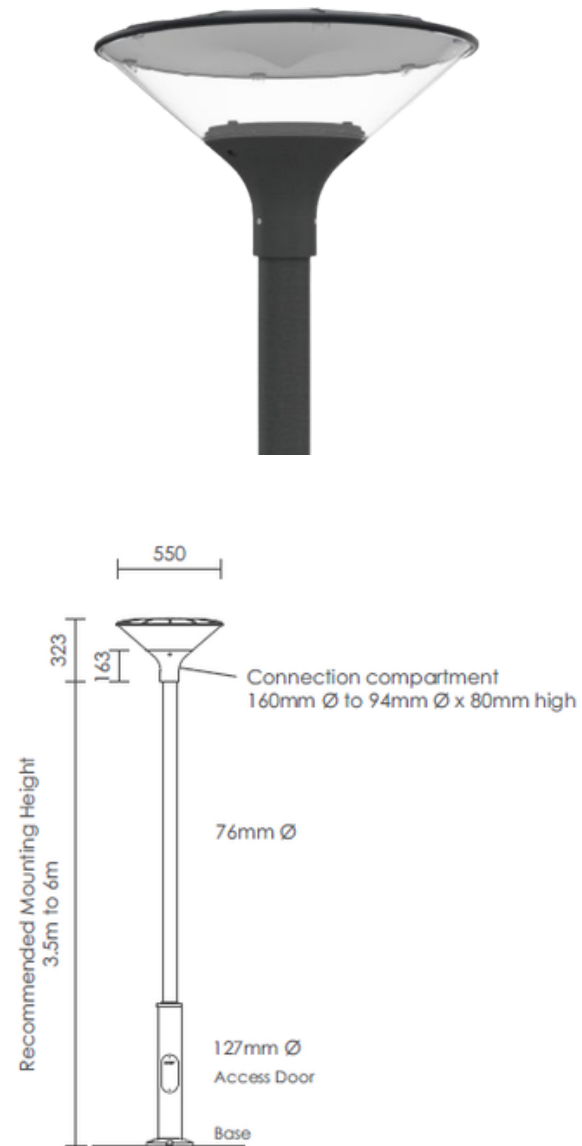

No. LED's		19 LED's				27 LED's			
LED CURRENT (mA)	COLOUR TEMP (K)	NOMINAL WATTAGE (W)	SYSTEM WATTAGE (W)	NOMINAL FLUX (lm)	SYSTEM FLUX (lm)	NOMINAL WATTAGE (W)	SYSTEM WATTAGE (W)	NOMINAL FLUX (lm)	SYSTEM FLUX (lm)
700mA	4000K	38W	43W	7931 lm	5539 lm	54W	59W	9952 lm	7237 lm
	3000K			7376 lm	5152 lm			9256 lm	6731 lm

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE