



TRIM

LED

Introducing the **TRIM** linear. It is an elegant solution for surface mount applications such as retail stores, walkways, parking garages and circulation areas.

LIGHT **LLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

TRIM




APPLICATIONS

- Public Buildings
- Shopping Malls
- Industrial Developments
- Commercial Developments
- Parking Lots

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	On request
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	4000K, 3000K
CRI	> 80
Lifetime	L80B10 ≥ 50 000 hours
Application Temperature	-20°C to 40°C
Available Emergency	On request
Warranty	5 Years - T's & C's apply
IP Rating	IP65
Housing Material	UV Stabilized Polycarb
Finish	White
Diffuser	PMMA semi transparent
Mounting	Surface

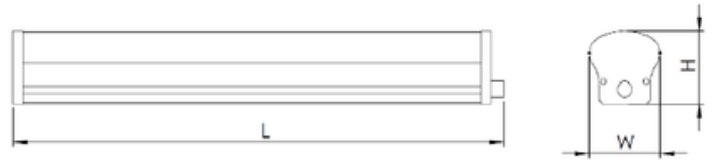

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions L x W x H	Beam Angle	Reference Code
20	2820	4000K	141	>80	600mm x 80mm x 77mm	90°	LAIT-020-4K
40	5700	4000K	142	>80	1200mm x 80mm x 77mm	90°	LAIT-040-4K
60	8300	4000K	143	>80	1500mm x 80mm x 77mm	90°	LAIT-060-4K
75	10650	4000K	142	>80	1700mm x 80mm x 77mm	90°	LAIT-075-4K
90	12960	4000K	144	>80	2250mm x 80mm x 77mm	90°	LAIT-090-4K

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%

We reserve the right to amend or change data without prior notification.
E&OE