



TRUE 16

LED CORNER PROFILE

Introducing the **TRUE16 CORNER PROFILE**. The **TRUE16 CORNER PROFILE** can be configured for multiple continuous runs, and is available in various wattages.



LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in *Lighting Solutions*

TRUE 16

CORNER PROFILE





APPLICATIONS

- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	DC 24V
Dimming Options	N/A
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED Tape
Power Factor	> 0.9
Available CCT	2700K, 4000K, Other
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	-10°C to 50°C
Available Emergency	N/A
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	N/A
Finish	N/A
Diffuser Material	PMMA UV Stabilized
Mounting	Surface Mount

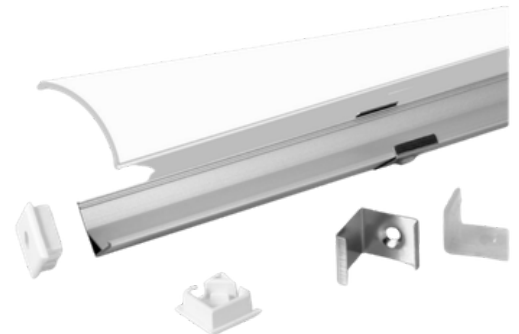

Luminaire W/meter	Output (Lumens)	Colour Temperature	Efficiency (lm/W)	CRI Rating	Guarantee	Voltage	Reference Code
4.8	520	4000K	108	>80	3 Years	24V	LATR16-4.8-SO-4K
8.7	1390	4000K	160	>80	5 Years	24V	LATR16-8.7-SO-4K
10.5 (COB)	1035	4000K	98	>90	5 Years	24V	LATR16-10.5-SO-4K
14.4	1650	4000K	114	>90	5 Years	24V	LATR16-14.4-SO-4K

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE