

LINEAR



TRUE 50 HEXAGON

LED

Introducing the **TRUE 50 Hexagon** linear LED light. Available in numerous sizes and colors and perfect for architectural and modern applications.


LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in *Lighting Solutions*



TRUE 50 HEXAGON

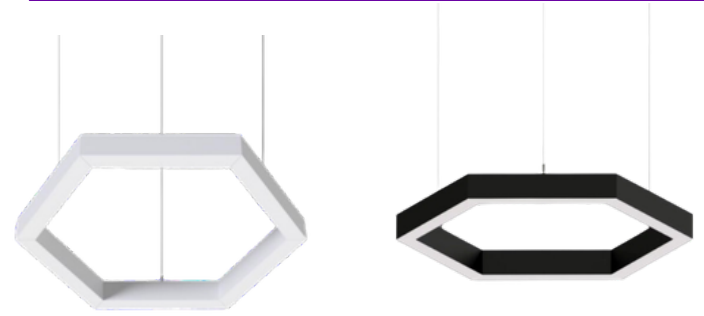


APPLICATIONS

- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	3000K, 4000K, Other
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	-10°C to 50°C
Available Emergency	1-3 Hours
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Extruded Aluminium
Finish	Natural, White, Black
Diffuser Material	PMMA UV Stabilized
Mounting	Surface or Suspended


Suspension Kit Mounting Illustration

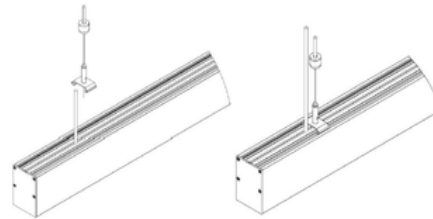

Simple to install


1. Attach the suspension kit to the mounting clip and secure the suspension kits onto a solid surface.
2. click on mounting the clip onto the top side of the profile.
3. Power must be switched off during the installation of the luminaire.

Joining Piece Illustration

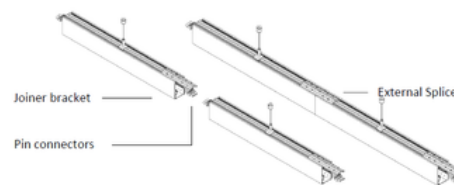


Simple to join

1. Connect 3pin and 2pin connectors.
2. Line up Joiner brackets and external splice.
3. Butt together and fasten external splice.



Diffused



Luminaire W/meter	Output (Lumens)	Colour Temperature	Efficiency (lm/W)	Dimensions (X x Y x Z)	Driving Current	Forward Voltage (V)	Reference Code
28	12760	4000K	160	940mm x 814mm x 470mm	350mA	197.7V	SSLT50H-940-4K
28	14890	4000K	160	1080mm x 935mm x 540mm	350mA	230.7V	SSLT50H-1080-4K
28	17120	4000K	160	1220mm x 1057mm x 610mm	350mA	264.6V	SSLT50H-1220-4K
28	19250	4000K	160	1360mm x 1178mm x 680mm	350mA	297.6V	SSLT50H-1360-4K
28	21370	4000K	160	1500mm x 1299mm x 750mm	350mA	330.6V	SSLT50H-1500-4K
28	23490	4000K	160	1640mm x 1420mm x 820mm	350mA	363.6V	SSLT50H-1640-4K
28	25650	4000K	160	1780mm x 1542mm x 890mm	350mA	396.3V	SSLT50H-1780-4K

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE