

LINEAR



TRUE 50 OVAL

LED

Introducing the **TRUE 50 Oval** linear LED light. Available in numerous sizes and colors and perfect for architectural and modern applications.

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in *Lighting Solutions*



TRUE 50 OVAL




APPLICATIONS

- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	3000K, 4000K, Other
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	-10°C to 50°C
Available Emergency	1-3 Hours
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Extruded Aluminium
Finish	White, Black
Diffuser Material	PMMA UV Stabilized
Mounting	Suspended

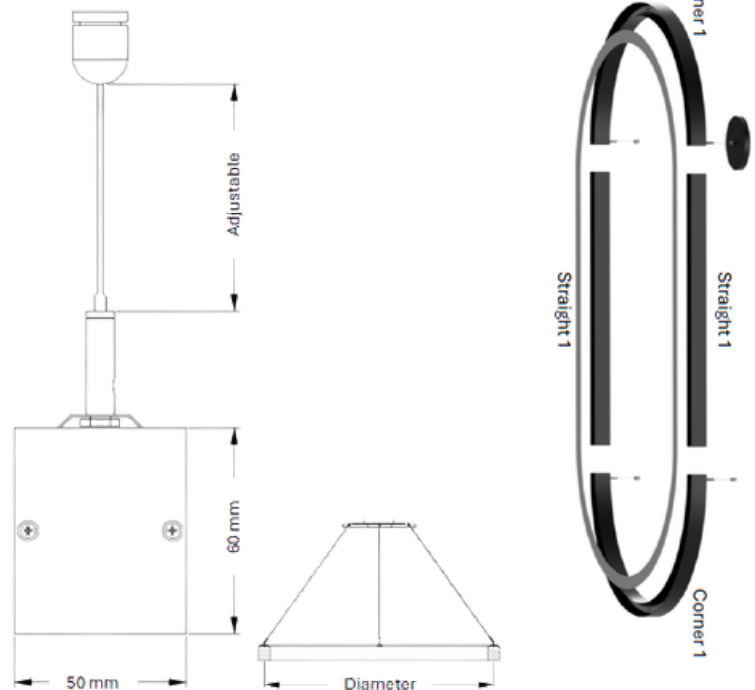

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficiency (lm/W)	Diameter	Item	Voltage (V)	Reference Code
32	5280	4000K	165	1000mm	Corner	24V	SLT50OC-1000-4K
42	7668	4000K	182	1500mm	Corner	24V	SLT50OC-1500-4K
66	10560	4000K	160	2000mm	Corner	24V	SLT50OC-2000-4K

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficiency (lm/W)	Diameter	Item	Voltage (V)	Reference Code
8.5	1441	4000K	169	505mm	Straight	24V	SLT50OS-505-4K
17	2882	4000K	169	1005mm	Straight	24V	SLT50OS-1005-4K
25.5	4323	4000K	169	1505mm	Straight	24V	SLT50OS-1505-4K

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE