


LINEAR

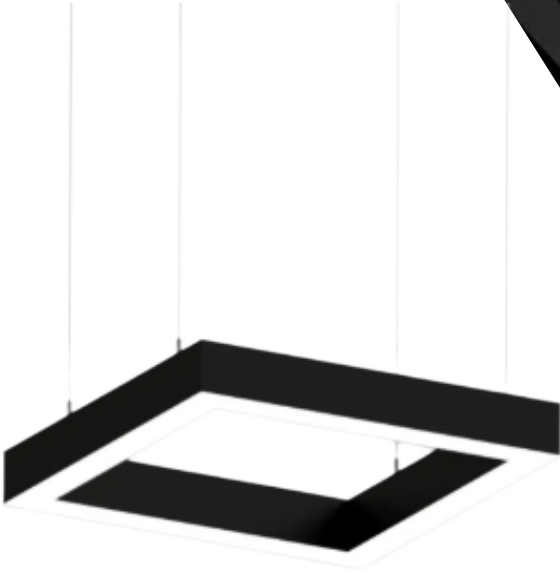

TRUE 50 SQUARE

LED

Introducing the **TRUE 50 Square** linear LED light. Available in numerous sizes and colors and perfect for architectural and modern applications.


LIGHT **LLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***



TRUE 50 SQUARE

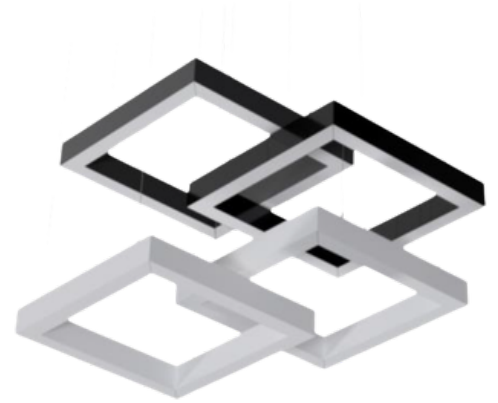


APPLICATIONS

- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	3000K, 4000K, Other
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	-10°C to 50°C
Available Emergency	1-3 Hours
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Extruded Aluminium
Finish	Natural, White, Black
Diffuser Material	PMMA UV Stabilized
Mounting	Surface or Suspended

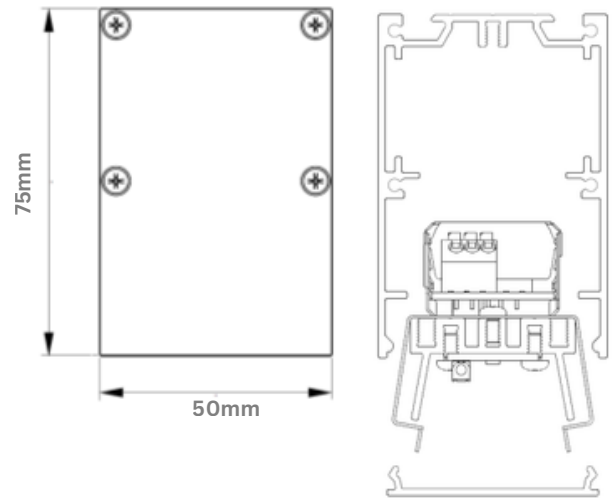

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficiency (lm/W)	Dimensions (size in mm)	Driving Current	Forward Voltage (V)	Reference Code
85	15600	4000K	183	840mmx840mmx75mm	350mA	197.7V	SLT50SQ-840-4K
93	17100	4000K	183	910mmx910mmx75mm	350mA	230.7V	SLT50SQ-910-4K
100	18500	4000K	185	1050mmx1050mmx75mm	350mA	264.6V	SLT50SQ-1050-4K
116	21300	4000K	183	1120mmx1120mmx75mm	350mA	297.6V	SLT50SQ-1120-4K
124	22800	4000K	183	1190mmx1190mmx75mm	350mA	330.6V	SLT50SQ-1190-4K
131	24250	4000K	185	1260mmx1260mmx75mm	350mA	363.6V	SLT50SQ-1260-4K
140	25650	4000K	183	1330mmx1330mmx75mm	350mA	396.3V	SLT50SQ-1330-4K

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE