



TRUE 50 TRIANGLE

LED


Introducing the **TRUE 50 Triangle** linear LED light. Available in numerous sizes and colors and perfect for architectural and modern applications.

LIGHT **LLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

TRUE 50 TRIANGLE

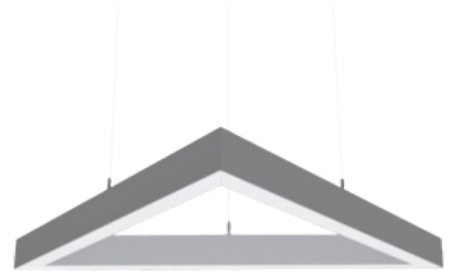


APPLICATIONS

- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	3000K, 4000K, Other
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	-10°C to 50°C
Available Emergency	1-3 Hours
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Extruded Aluminium
Finish	Natural, White, Black
Diffuser Material	PMMA UV Stabilized
Mounting	Surface or Suspended

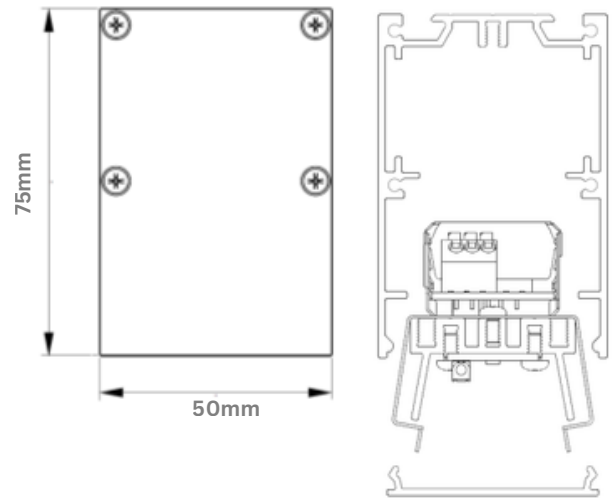

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficiency (lm/W)	Dimensions (size in mm)	Driving Current	Forward Voltage (V)	Reference Code
52	9580	4000K	184	745mmx745mmx745mm	350mA	148.2	SLT50TR-745-4K
58	10645	4000K	183	815mmx815mmx815mm	350mA	164.7	SLT50TR-815-4K
64	11700	4000K	182	890mmx890mmx890mm	350mA	181.2	SLT50TR-890-4K
70	12760	4000K	182	960mmx960mmx960mm	350mA	197.7	SLT50TR-960-4K
76	13830	4000K	183	1035mmx1035mmx1035mm	350mA	214.2	SLT50TR-1035-4K
81	14890	4000K	183	1105mmx1105mmx1105mm	350mA	230.7	SLT50TR-1105-4K
87	16010	4000K	184	1175mmx1175mmx1175mm	350mA	247.7	SLT50TR-1175-4K

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE