


LINEAR

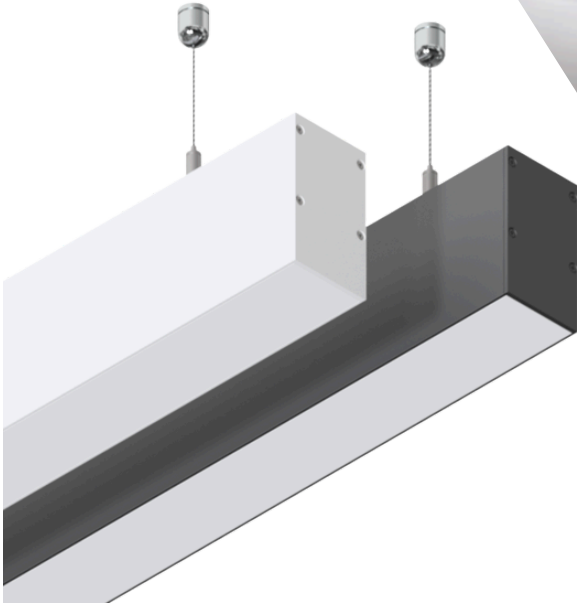

TRUE 50 SUSPENDED UP/DOWN

LED


Introducing the **TRUE 50 Suspended up/down** linear LED light. The **TRUE 50 Suspended up/down** can be configured for multiple continuous runs.

LIGHT **LLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

TRUE 50 SUSPENDED UP/DOWN


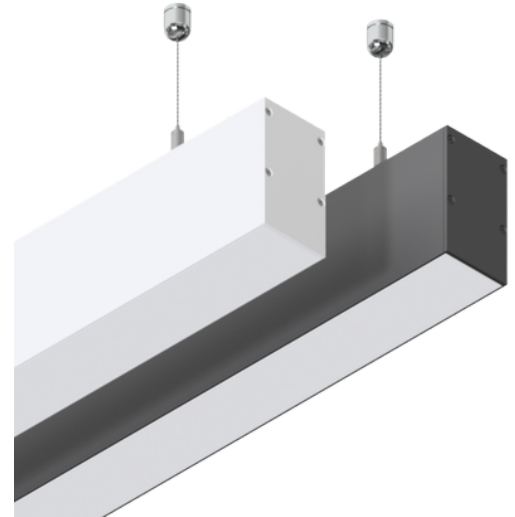


APPLICATIONS

- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	3000K, 4000K, Other
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	-10°C to 50°C
Available Emergency	1-3 Hours
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Extruded Aluminium
Finish	Natural, White, Black
Diffuser Material	PMMA UV Stabilized
Mounting	Suspended / Surface

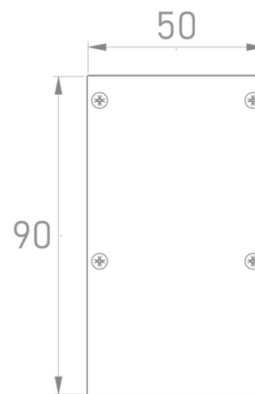

Removable Light Engine for ease of installation and maintenance

Luminaire W/meter	Output (Lumens)	Colour Temperature	Efficiency (lm/W)	CRI Rating	Driving Current	Forward Voltage (V/m)	Reference Code
24	4100	3000K	173	>80	300mA	78.3V	LASLUD50-SO-3K
24	4300	4000K	181	>80	300mA	78.3V	LASLUD50-SO-4K
50	8700	3000K	172	>80	350mA	141.6V	LASLUD50-HO-3K
50	8890	4000K	176	>80	350mA	141.6V	LASLUD50-HO-4K

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE