

OUTDOOR



VISION LED MINI

Introducing the **VISION MINI** street light. It's sleek design makes for aesthetic views with powerful light performance.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***



VISION MINI




APPLICATIONS


- Public Buildings
- Parks
- Walkways
- Commercial Developments

PRODUCT SPECIFICATIONS


LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	On request
Flicker Rating	Low ripple current
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.8
Available CCT	3000K, 4000K
CRI	80
Lifetime	Up to 70 000 hours
Application Temperature	-10°C to 30°C
Available Emergency	None
Warranty	5 Years - T's & C's apply
IP Rating	65
Housing Material	LM6 Die cast aluminium
Finish	Black
Diffuser	PMMA Optical lens
Mounting	Plinth

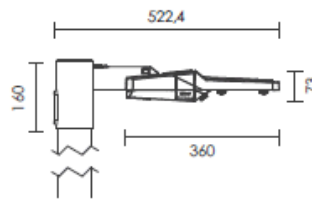


Lumina Mini
76mm SPIGOT
Side View

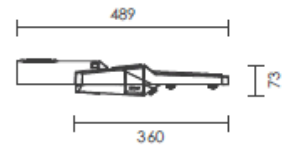

Lumina Mini
42mm SPIGOT
Side View




Lumina Mini
76mm SPIGOT
Top View



Lumina Mini
42mm SPIGOT
Top View

No. LED's		64 LED's				
LED CURRENT (mA)	COLOUR TEMP (K)	NOMINAL WATTAGE (W)	SYSTEM WATTAGE (W)	NOMINAL FLUX (lm)	SYSTEM FLUX (lm)	DIMMING OPTION
500mA	5000K	23.6W	28W	4320 lm	3643 lm	stepDIM available on request
	4000K			4235 lm	3571 lm	
	3000K			3981 lm	3357 lm	
700mA	5000K	33.1W	37W	6048 lm	5100 lm	stepDIM
	4000K			5929 lm	5000 lm	
	3000K			5574 lm	4700 lm	
1050mA	5000K	49.6W	56W	9071 lm	7650 lm	stepDIM
	4000K			8893 lm	7500 lm	
	3000K			8360 lm	7050 lm	

56W DKP65LES

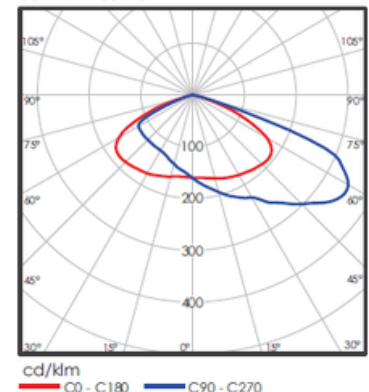

LIGHTALLIANCE

Projects (PTY) Ltd.
Partners in *Lighting Solutions*

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE