



ZOLA S

LED

The **ZOLA S** is a Coastal grade LED flood with non corrosive body and IP66 rating. It is also adjustable on the projecting direction.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

*Partners in **Lighting Solutions***

ZOLA S



APPLICATIONS

- Public Buildings
- Industrial Developments
- Stadiums
- Commercial Developments

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240V
Dimming Options	DALI on request
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.9
Available CCT	5700K
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	-20°C to 50°C
Warranty	5 Years - T's & C's apply
IP Rating	66
Housing Material	Die Cast Aluminium
Finish	Black
Diffuser	Optic PMMA UV stabilized
Mounting	Surface Mount




Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (L x W x H)	Beam Angle	Reference Code
200	34000	5700K	170	>80	351mm x 190mm x 115mm	60°	LAFLZS-200-57K
400	68000	5700K	170	>80	351mm x 340mm x 115mm	60°	LAFLZS-400-57K
600	102000	5700K	170	>80	353mm x 447mm x 196mm	60°	LAFLZS-600-57K
800	136000	5700K	170	>80	353mm x 600mm x 188mm	60°	LAFLZS-800-57K
1000	170000	5700K	170	>80	689mm x 488mm x 209mm	60°	LAFLZS-1000-57K
1200	204000	5700K	170	>80	689mm x 488mm x 209mm	60°	LAFLZS-1200-57K

LIGHT ALLIANCE


Projects (PTY) Ltd.
Partners in Lighting Solutions

Disclaimer:


Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE

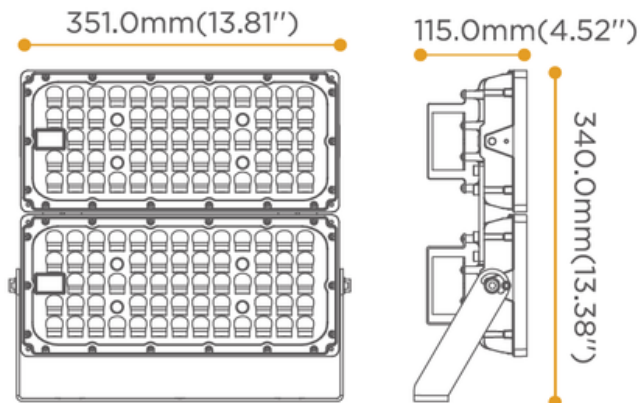


400W

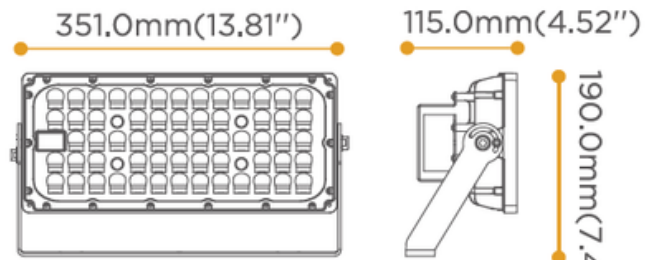


200W

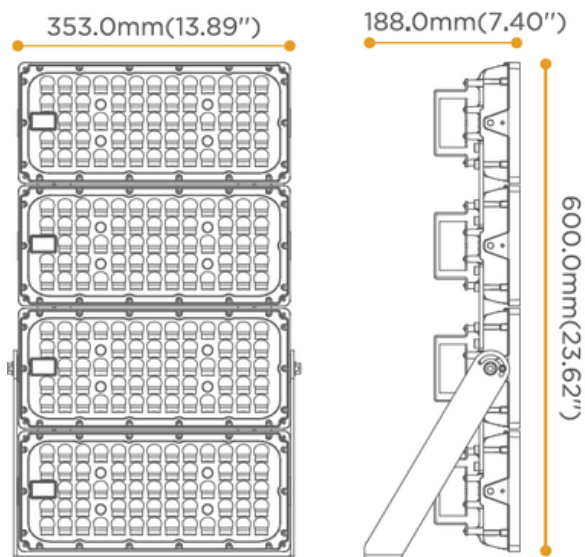

800W

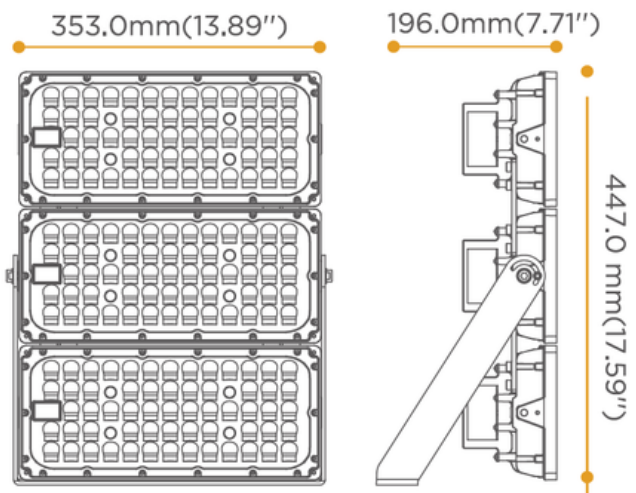

600W

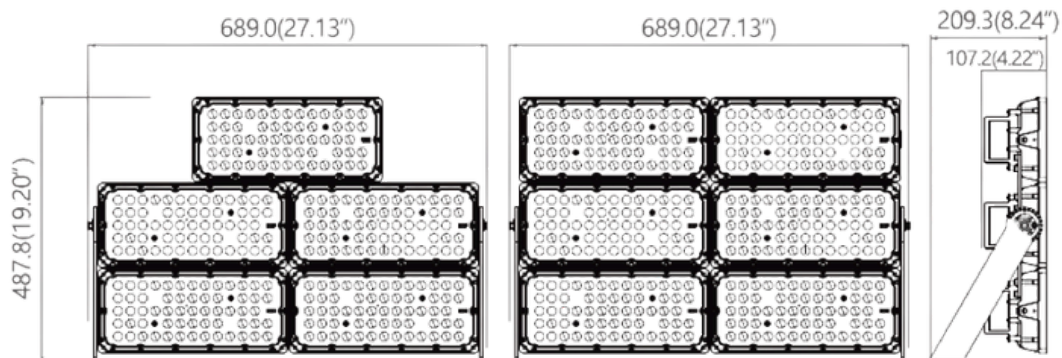

1000W & 1200W

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%

We reserve the right to amend or change data without prior notification.
E&OE