

OUTDOOR



ZURI

LED

Introducing the **ZURI** street light. Sleek design meets high performance. The **ZURI** is rated 140,000 hours of lifetime.

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in *Lighting Solutions*

ZURI




APPLICATIONS

- Public Buildings
- Parks
- Walkways
- Commercial Developments

PRODUCT SPECIFICATIONS

LED Driver	Internal
Input Voltage	220-240 V
Dimming Options	On request
Flicker Rating	Low ripple current
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.8
Available CCT	3000K, 4000K
CRI	80
Lifetime	Up to 140 000 hours
Application Temperature	-10°C to 30°C
Available Emergency	None
Warranty	5 Years - T's & C's apply
IP Rating	66
Housing Material	LM6 Die cast aluminium
Finish	Black
Diffuser	PMMA Optical lens
Mounting	Post mount, wall mount

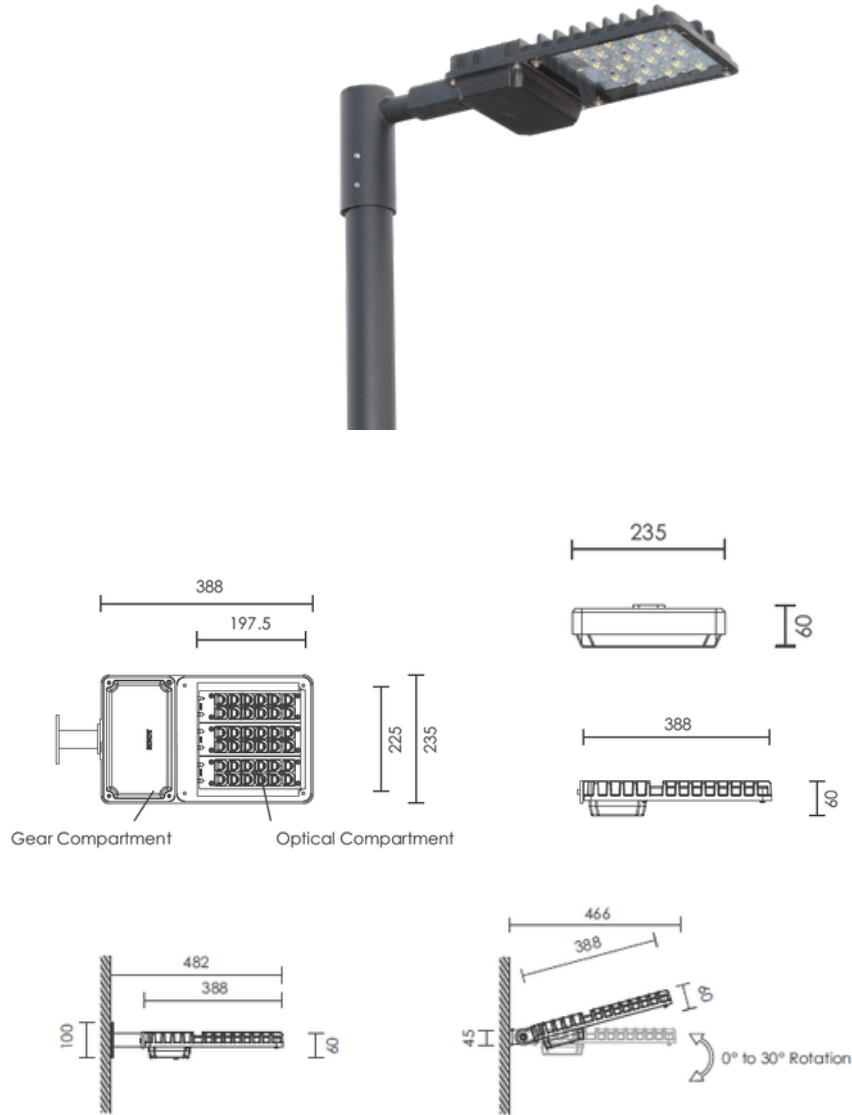

No. LED's		12 LED's				24 LED's				36 LED's			
LED CURRENT (mA)	COLOUR TEMP (K)	NOMINAL WATTAGE (W)	SYSTEM WATTAGE (W)	NOMINAL FLUX (lm)	SYSTEM FLUX (lm)	NOMINAL WATTAGE (W)	SYSTEM WATTAGE (W)	NOMINAL FLUX (lm)	SYSTEM FLUX (lm)	NOMINAL WATTAGE (W)	SYSTEM WATTAGE (W)	NOMINAL FLUX (lm)	SYSTEM FLUX (lm)
200mA	5000K	13W	17W	2858 lm	2344 lm	26W	33W	5716 lm	4687 lm	39W	45W	8574 lm	7031 lm
	4000K			2658 lm	2180 lm			5316 lm	4359 lm			7974 lm	6539 lm
	3000K			4873 lm	3996 lm			9746 lm	7992 lm			14619 lm	11988 lm
350mA	5000K	24W	28W	4532 lm	3716 lm	50W	55W	9064 lm	7432 lm	70W	79W	13596 lm	11148 lm
	4000K			6138 lm	5033 lm			12276 lm	10066 lm			18414 lm	15099 lm
	3000K			5708 lm	4681 lm			11417 lm	9362 lm			17125 lm	14043 lm
450mA	5000K	30W	35W	7040 lm	5773 lm	61W	70W	14080 lm	11546 lm	93W	102W	21120 lm	17318 lm
	4000K			6547 lm	5369 lm			13094 lm	10737 lm			19642 lm	16106 lm
	3000K			7925 lm	6499 lm			15850 lm	12997 lm			23775 lm	19496 lm
525mA	5000K	36W	40W	7370 lm	6044 lm	84W	95W	14741 lm	12087 lm	126W	137W	22111 lm	18131 lm
	4000K			8788 lm	6499 lm			17576 lm	14412 lm				
	3000K			8173 lm	6702 lm			16346 lm	13403 lm				

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in Lighting Solutions

Disclaimer:

Component manufacturer data is used and could vary +-10%

We reserve the right to amend or change data without prior notification.

E&OE