



LEILA

LED

The **LEILA** is a direct / indirect suspended luminaire with a stylish design and transparent diffuser, perfect for aesthetic installations.

LIGHTALLIANCE

Projects (PTY) Ltd.

Partners in *Lighting Solutions*

www.lightalliance.co.za

LEILA




APPLICATIONS

- Public Buildings
- Industrial Developments
- Hospitality
- Commercial Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.95
Available CCT	3CCT (3000K, 4000K, 5700K)
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	Ta < 35°C
Available Emergency	None
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Aluminium
Finish	White
Diffuser	PMMA and PS
Mounting	Suspended

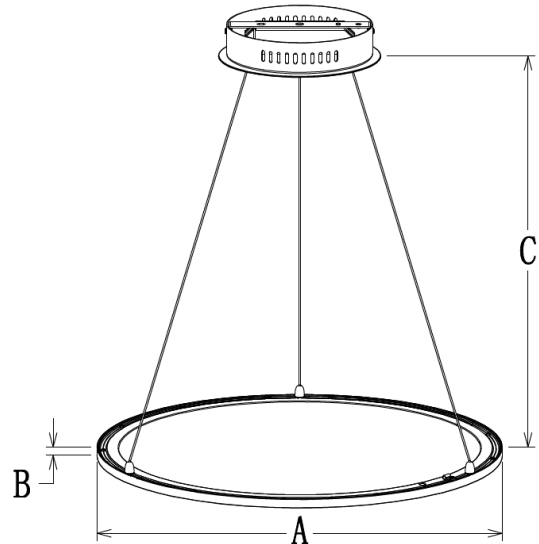

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (A x B x C)	Beam Angle	Reference Code
18	1695	4000K	94	>80	300mm x 11.5mm x 1200mm	120°	LAPLDG-018-CCT
35	3360	4000K	96	>80	400mm x 11.5mm x 1200mm	120°	LAPLDG-035-CCT
40	3920	4000K	98	>80	500mm x 11.5mm x 1200mm	120°	LAPLDG-040-CCT
60	5790	4000K	97	>80	600mm x 11.5mm x 1200mm	120°	LAPLDG-060-CCT

LIGHT ALLIANCE

Projects (PTY) Ltd.
Partners in **Lighting Solutions**

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE