



DISC

LED

The stylish **DISC** recessed downlight has a low profile design, perfect for applications where ceiling space is limited. With its slim design and high efficiency, the **DISC** is perfect for Retail, Office and General installations.

LIGHT **ALLIANCE**

Projects (PTY) Ltd.

Partners in *Lighting Solutions*

DOWNLIGHTS

DISC






APPLICATIONS

- Public Buildings
- Industrial Developments
- Ablutions
- Commercial Developments
- Retail Developments
- Shopping Malls

PRODUCT SPECIFICATIONS

LED Driver	External
Input Voltage	220-240 V
Dimming Options	DALI, Other
Flicker Rating	< 5%
Low Ripple Current	Yes
Light Source	LED
Power Factor	> 0.95
Available CCT	3000K, 4000K
CRI	> 80
Lifetime	Up to 50 000 hours
Application Temperature	Ta < 35°C
Available Emergency	1Hr - 3Hr
Warranty	5 Years - T's & C's apply
IP Rating	20
Housing Material	Aluminium
Finish	White
Diffuser	Opal Diffuser
Mounting	Recessed

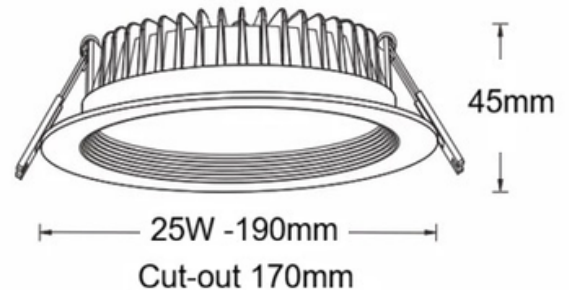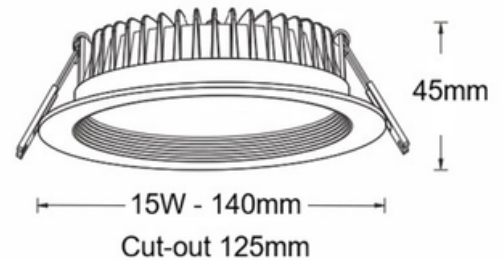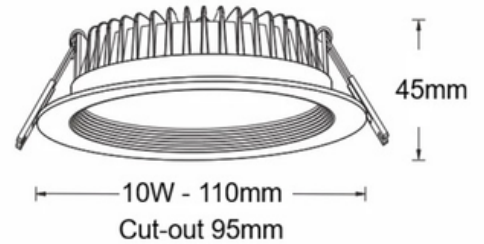

Luminaire Wattage	Output (Lumens)	Colour Temperature	Efficacy (lm/W)	CRI Rating	Dimensions (A x C)	Cutout Size	Beam Angle	Reference Code
10	1100	3000K	110	>80	110mm x 45mm	95mm	100°	DLDC-010-3K
10	1200	4000K	120	>80	110mm x 45mm	95mm	100°	DLDC-010-4K
15	1680	3000K	112	>80	140mm x 45mm	125mm	100°	DLDC-015-3K
15	1800	4000K	120	>80	140mm x 45mm	125mm	100°	DLDC-015-4K
25	2800	3000K	112	>80	190mm x 45mm	170mm	100°	DLDC-025-3K
25	3000	4000K	120	>80	190mm x 45mm	170mm	100°	DLDC-025-4K

Disclaimer:

Component manufacturer data is used and could vary +-10%
We reserve the right to amend or change data without prior notification.
E&OE